



Datasheet

Stock No. 190-2834, 190-2835, 190-2836 RS PRO 50MM STEADY/FLASHING LIGHT TOWER 3 COLOUR



ENGLISH

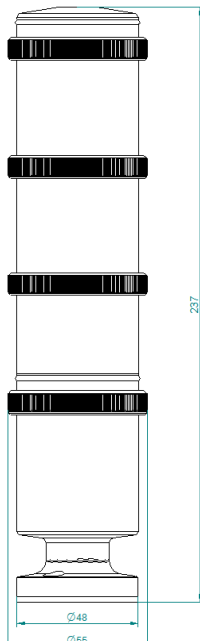


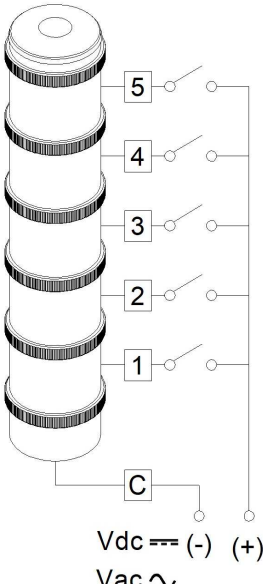
Luminous warning STACK LIGHT

BODY	PC												
RING	PC												
LUMINOUS SOURCE	N°4 LED												
AVAILABLE COLOURS													
VOLTAGE	24 Vac/dc - 110 Vac - 240 Vac												
OPERATION	∞												
CURRENT CONSUMPTION	<table border="1"> <thead> <tr> <th>Stock No</th> <th>1902834</th> <th>1902835</th> <th>1902836</th> </tr> </thead> <tbody> <tr> <td>VOLTAGE</td> <td>24 Vac/dc</td> <td>110 Vac</td> <td>240 Vac</td> </tr> <tr> <td>MAX (mA)</td> <td>90</td> <td>195</td> <td>165</td> </tr> </tbody> </table>	Stock No	1902834	1902835	1902836	VOLTAGE	24 Vac/dc	110 Vac	240 Vac	MAX (mA)	90	195	165
Stock No	1902834	1902835	1902836										
VOLTAGE	24 Vac/dc	110 Vac	240 Vac										
MAX (mA)	90	195	165										
LIGHT OUTPUT	<table border="1"> <thead> <tr> <th>ALL COLOR Cd(p)</th> <th>3</th> <th>2</th> <th>1</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	ALL COLOR Cd(p)	3	2	1								
ALL COLOR Cd(p)	3	2	1										
LIGHT EFFECT	Steady - Flashing												
IP RATING	IP66												

These data are disclosed only for information purposes. RS Components reserves the right to modify them at any time without prior notice.

OPERATING TEMPERATURE	-30°C+50°C
VIBRATIONS	INDUSTRIAL CEI 60068-2-6 SINE
CERTIFICATIONS, APPROVALS	CE
MOUNTING	Ring

TECHNICAL DRAWING	
--------------------------	---

ELECTRICAL WIRING	
--------------------------	--