



Datasheet 315A rotary Switch, IP65

RS Stock number 733-5653



Description:

Battery Isolation switch

For automotive, traction and marine applications. For security reasons spare keys are not available

12/24V dc isolation switches provide simple and effective disconnection of battery banks from equipment for safety, security, servicing or operation

The heavy duty switch has a fixed T-handle operation (fitted after installation in panel). The medium duty switch has an actuator, which is removable in the off position

The keyed isolator has a chrome finish and the key is removable in either position

RS, Professionally Approved Products, gives you professional quality parts across all product categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.





Specification:

• Protection Degree: IP65

• Temperature of use: -30 C, +80 C

Cover Material: MetallicHandle Material: Metallic

• Weight: 400g

Handle: Red ColourCover: Black Colour


Power Circuit:

Connection: Not Polarized
Ratings: 315 / 2500A(10 sec)
Maximum Voltage of use: 48VDC

• Terminals Diameter: M10

Tightening Torque: 0.9 0.1 daN.mAvailable length of terminals: 3.5mm

Dimensions:

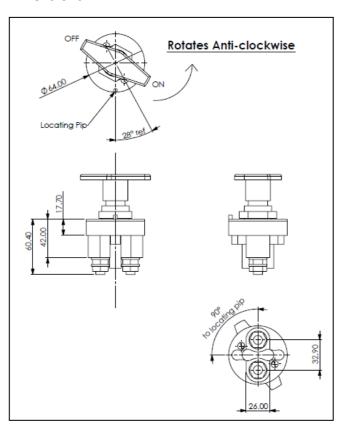

RS, Professionally Approved Products, gives you professional quality parts across all products categories. Our range has been testified by engineers as giving comparable quality to that of the leading brands without paying a premium price.