


# LED BERTH LIGHT



## BL SERIES



### Application

Passageways, Cabins, Lounges, Dining rooms, Accomodation areas

### Mounting Method

2 mounting holes ø5.5mm

### Material

Diffuser: Polycarbonate

Housing: Galvanized steel, Powder coated white

### Electrical


Flexible wiring, Heat resistance up to 105°C

### Weight

0.25Kg

### Key Features

- Special design polycarbonate diffuser to optimize the LED light transmission
- Slim profile design that is easily mounted to provide illumination performance while using significantly less energy
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- Safety, EMC and IEC compliance

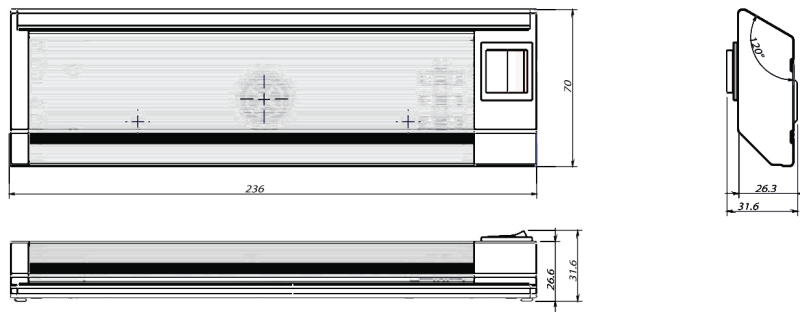

## TECHNICAL SPECIFICATIONS IP 20

BH Code	Type	Voltage	Power	CCT	Ambient Temp (Ta)	System Lumen
LABL44A2	BL44A2	220V - 240V AC	4W	4000K	-20°C ~ +40°C	280lm
LABL44A1	BL44A1	100V - 120V AC	4W	4000K	-20°C ~ +40°C	280lm

Also available in other CCT.