

HUAWEI IdeaHub

Intellingence at Your Fingertips

IdeaHub Pro 65'86' IdeaHub S 65'86'






HUAWEI IdeaHub Overview

Incorporating intelligent handwriting, HD projection, video conferencing and open office AppGallery, Huawei IdeaHub series is your new option for smart office in meeting room, open office, executive boardroom, home office and many other scenarios.



Various Application Scenarios

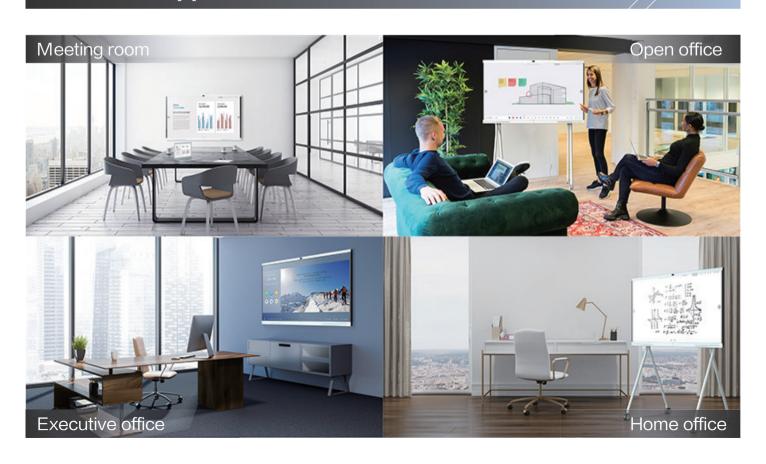

Product Highlights



Elegant Simplicity

- Modern user-centric design
- · Gentle jade white frame
- Slender artistic stand

4K UHD Projection for Better User Experience

- Smoother projection and 60 fps
- Higher-definition images and 4K H.265
- More accurate mouse-pointing and ultra-low cursor latency





Superb Interactive Whiteboard with Ultra-low Latency

- 35ms ultra-low writing latency and smooth writing experience
- Intelligent handwriting recognition and auto conversion to text
- Scan to save minutes for higher efficiency

Cloud Meeting Support, Easy to Use

- Support 3rd party cloud meeting service (OPS module required)
- High network adaptability, 30% PLC for video, and 80% PLC for audio



Product Highlights



Native 4K & Al for Better Meeting Experience

- H.265 HD video and 4K content sharing
- Flexible Layout with SVC Multistream
- Auto-Framing

Device-Cloud Synergy, Enormous Apps

- Popular apps pre-installed and customizable homepage
- Huawei appGallery and 170+ HD apps
- Private application portal and web app distribution







Bulletin Board

- Company culture demonstration
- Real-time release of the company internal information in the bulletin
- Hierarchical content management for customization based on scenarios

Open Software and Hardware for Industry Applications

- Windows platform extension, OPS: optional extension module for Windows
- Open SDK: allows 3rd-party to use hardware and audiovisual capability
- Smart finance, smart education, smart healthcare



Technical Specifications

Technical Specification				
Model	IdeaHub Pro		IdeaHub S	
Screen size	65"	86"	65"	86"
Components	I			
Main body	Codec, camera, microphone array, and speaker			
Stylus (pen)	2			
Wall-mounted bracket	√(optional)	√(included)	√(optional)	√(included)
Rolling stand	√(optional)	×	√(optional)	×
Cables		Network cables an	·	
Touch (tablet)	√(optional)	√(optional)	√(optional)	√(optional)
IdeaShare	√(optional)			
System				
CPU	Dual-chip 4-core@1.5 GHz + 4-core@1.8 GHz			
RAM	4GB+8GB			
Flash	64GB			
Al computing power	4T FLOPS			
Screen				
Screen type	E-LED	D-LED	E-LED	D-LED
Resolution		41	Κ	
Refresh rate	60Hz			
Precision	±1mm			
Multi-touch	20 points			
Anti-reflection and glare	√			
Adaptive brightness	√			
Camera				
Resolution	4K30	4K30	1080p30	1080p30
Auto voice tracking	√	√	×	×
AutoFrame		√		
Ultra-wide angle		80)°	
Anti-fog, dust-proof, and anti-flicker	√			
Zoom	2x digital zoom			
Speakers				
Frequency domain	100Hz~22KHz			
Quantity	4			
Stereo audio	√			
Microphones				
Sound pickup distance	8 m			
Sound pickup angle	180° forward			
Quantity	12			
Frequency domain	100Hz~20KHz			
Enhanced functions	Echo cancellation, noise suppression, auto gain control, and external microphone			

Technical Specifications

Model	ns-2 IdeaHub Pro		IdeaH	IdeaHub S	
Screen size	65"	86"	65"	86"	
Ports					
Video input ports	1 x built-in camera 1 x HDMI (4K 30fps), 1 x HDMI (1080p 60fps, external cameras) 1 x optional OPS input (4K 30fps)				
Video output ports	1 x built-in LCD 1 x HDMI (1080p 60fps)				
Audio input ports	1 x built-in microphone array 1 x 3.5 mm LINE IN 1 x HD-AI 1 x OPS input (optional) 1 x HDMI (audio input, conflicted with OPS)				
Audio output ports	1 x built-in microphone 1 x 3.5 mm LINE OUT 1 x HDMI (audio output)				
Other ports	2 x USB 3.0 Type-A 1 x USB 2.0 Type-B 1 x RJ45 (10/100/1000 Mbit/s LAN) 1 x RJ45 (for Touch)				
Wi-Fi	2.4 GHz and 5 GHz				
Bluetooth			√		
Electricity Supply Require	ments				
Rated operating voltage		100V ~	240V AC		
Operating frequency	50Hz~60Hz				
Max. power	350 W	450 W	350 W	450 W	
Environment Requiremen	ts				
Noise		≤46d	BA SPL		
Altitude		< 50	000 m		
Temperature	IdeaHub: 0°C to 40°C, Touch: 0°C to 35°C (operating state) -20°C to +60°C (non-operating state)				
Relative humidity	5% to 95% (non-operating state) 5% to 95% (non-operating state)				
Recommended illuminance	> 200 lux				
Min. illuminance	7Lux				
Certification					
Regulatory compliance	CCC, CE (RoHS, REACH, and WEEE), VCCI, Network Access License of MIIT, and Radio Type Approval Certification				
Dimensions and Weight	<u></u>				
Package dimensions (H x W x D)	1720×1114×246mm	2236×1404×356mm	1720×1114×246mm	2236×1404×356mm	
Product dimensions (H x W x D)	1492.5×931.1×71mm	1963.8×1195.1×95mm	1492.5×931.1×71mm	1963.8×1195.1×95mm	
Gross weight	63kg	110kg	63kg	110kg	
Net weight	50kg	90kg	50kg	90kg	

Note: The dimensions and weight may vary with configuration, manufacturing process, and measurement method.

Technical Specifications

Technical Specifications-3				
Model	IdeaHub Pro	IdeaHub S		
Screen size	65" 86"	65" 86"		
Communications Protocols				
Multimedia framework protocols	ITU-T H.323 and IETF SIP			
Audio codec protocols	AAC-LD mono/stereo, G.711A, G.711U, G.722, G.722.1C, and OPUS			
Video codec protocols	H.265, H.264 SVC, H.264 HP, and H.264 BP			
Network transmission protocols	TCP/IP, RTP, RTCP, DHCP, DNS, SMTP, SNMP, SNTP, Telnet, SSH, HTTP, HTTPS, and TR-069			
Dual-stream protocols	ITU-T H.239 and BFCP			
Other communications protocols	H.225, H.235, H.241, H.245, H.281, H.460, RFC2833, LDAP, and LDAPS			
Wi-Fi standards	IEEE 802.11 a/b/g/n/ac/w, IEEE 802.1x, WPA2, Wi-Fi AP, and station mode			
IP protocols	IPv4 and IF	v6 dual stack		
Conference Specifications				
Conferencing mode	Native conferencing			
Codec	H.265 1080p hardware codec			
Video resolutions	Min. H.264 bandwidth 1080p 30 fps 720p 60 fps 720p 30 fps Min. H.265 bandwidth 1080p 30 fps 720p 60 fps 720p 30 fps	Min. bandwidth: 512 Kbit/s Min. bandwidth: 768 Kbit/s Min. bandwidth: 384 Kbit/s Min. bandwidth: 384 Kbit/s Min. bandwidth: 512 Kbit/s Min. bandwidth: 256 Kbit/s		
Content resolutions	Input: 1920 × 1080 24/25/30/50/60 fps 1920 × 1200 60 fps 3840 × 2160 25/30/50/60 fps Output: 1920 × 1080 3840 × 2160 Codec resolutions: 1080p (1920 x 1080) 1920 x 1200 4K (3840 x 2160)	Input: 1920 × 1080 24/25/30/50/60 fps 1920 × 1200 60 fps 3840 × 2160 25/30/50/60 fps Output: 1920 × 1080 Codec resolutions: 1080p (1920 x 1080) 1920 x 1200		
Dual-stream resolutions	Video conferencing: 1080p 30 fps + 1080p 30fps 1080p 30 fps + 4K 8 fps Data conferencing: 1080p 30 fps 4K 8 fps	Video conferencing: 1080p 30 fps + 1080p 30 fps Data conferencing: 1080p 30 fps		
Languages	Simplified Chinese, traditional Chinese, English, Spanish (Europe), French, Russian, Japanese, German, and Portuguese (Brazil)			
Security	Embedded encryption chip that supports H.235, STARTTLS, TLS, SRTP encryption, and Chinese cryptographic algorithms			

Subscription Information

Product Name	Appearance	Remarks
HUAWEI IdeaHub Pro 65 HUAWEI IdeaHub Pro 86 HUAWEI IdeaHub S 65 HUAWEI IdeaHub S 86	238-790	-
Mount	Appearance	Remarks
Rolling Stand		Optional for 65'' model
Wall Mount Bracket		Included for 86'' model Optional for 65'' model
Optional Accessories	Appearance	Remarks
IdeaShare		-
CloudLink Touch	to and the same of	-

Learn More>>>

Enterprise Collaboration Website



Copyright © Huawei Technologies Co., Ltd. 2020. All rights reserved.

No part of this document may be reproduced or transmitted in any form or by any means without the prior written consent of Huawei Technologies Co., Ltd.

Trademarks and Permissions

HUAWEI, HUAWEI, and We are trademarks or trade names of Huawei Technologies Co., Ltd. All other trademarks, product names, service names, and company names mentioned in this document are the property of their respective holders.

Disclaimer

The technical specifications described in this document include but are not limited to parameters and performance indicators and vary depending on the actual release. This document does not constitute a warranty of any kind, expressed or implied. Huawei may update relevant information from time to time. Huawei reserves the right to update or correct the information about related products or solutions. Updates are described in detail in the latest release notes or introduction.

Huawei Technologies Co., Ltd. Huawei Industrial Base, Bantian, Longgang Tel: +86 755 28780808 Postal code: 518129

Updated: April 2020 www.huawei.com