


Datasheet

RS Pro Standard DIN Rail Terminal, RK series, 0.2 to 4mm², 500 V, 40A, Brown

RS Stock No: **501-825**

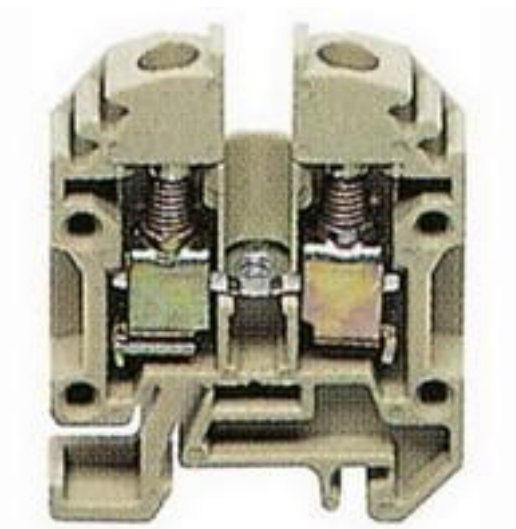

Product Details

RS Pro standard DIN rail terminal in brown colour, is suitable for use with standard 15 mm symmetrical rail. It has a current rating of 40 A and voltage rating of 500 V. It supports wire size of 0.2 to 4 mm². The DIN rail terminal meets UL, NEMKO and CSA standards.

Features and Benefits

- Suitable for use with standard 15 mm symmetrical rail
- Earth terminal tightens on with centre screw
- Disconnect has lever action for isolation of circuits
- Screwless end stop simply dips onto rail

**Specifications:**

Cable CSA	0.2 to 4 mm ²
Colour	Beige
Current Rating	24 A
Maximum Operating Temperature	+105°C
Minimum Operating Temperature	-40°C
Number of Levels	Single
Pitch	6 mm
Voltage Rating	500 V
Wire Size	22 to 10 AWG
Clamping Area	0.2 to 4 mm
Dimensions	48 x 6 x 34.5 mm
Material	Nylon 66
Screw Size	M3
Standards Met	UL, CSA, NEMKO



Accessories for RS 501825	501825	
	RS Part No	Description
End Cover	815650	End Plate for 1.5-4mm Terminal Beige
Pre Assembly Bar	815789	4mm 10 Way Cross Connectors 20Amps
Markers	501623	6mm wide blanks for 6mm + terminals
	501629	6mm wide numbered 1-50 markers
	501679	6mm numbered 51-100 markers

Suitable terminals for RS	815789	
	RS Part No	Description
	815701	4mm Double Deck Terminal
	501998	Double deck terminal 4mm, int connect
	501825	Miniature terminal, 15mm symmetric rail
	815638	1.5-4mm Terminal Beige (Small Top)
	815644	1.5-4mm Terminal Blue (Small Top)