


09C 80-350

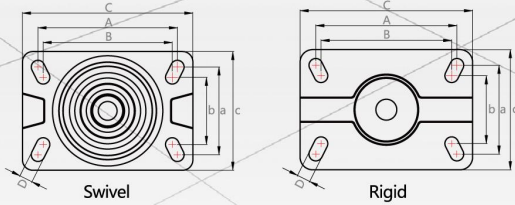

PU

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

* Remark: Please refer to the standard of Zhongshan caster industry association.

Wheel: Thermoplastic polyurethane (PU).
Wheel surface hardness: 90-93° Shore A.
Wheel core structure: cast iron.
Bearing: SUPO customization ball bearing with dust cover.

Swivel Top Plate	Wheel Material	NO. Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(PU)	J09C-01-125-282	125(5")	50	80-290	167-190	107-110	168-171	Double Ball Bearing	(C)165x115	(A)135x85 (B)125x65	(D)13
		J09C-01B-125-282										
		J09C04-125-282										
		J09C-01-150-282										
		J09C-01B-150-282										
		J09C04-150-282										
		J09C-01-200-282	200(8")	80-350	232-260	177-181	228-231					
		J09C-01B-200-282										
		J09C04-200-282										

Customization

01 series

03S series

05S series

07S series

08 series

09C series

10 series

11 series

12 series

13 series

17 series

20 series

21 series

23 series

24 series

27series

28 series

30 series

35 series

43 series

F02 series

L01 series