


## FEATURES

- Glow wire resistance test temp: GWT750°C in 2 sec
- Working temperature of 150°C
- Terminal screw material: white zinc plated steel
- 25mm high
- 32.2mm wide

## RS PRO, 12 Way, 16mm<sup>2</sup>, Glass Fibre Reinforced, Polyamide Disconnect Terminal Block, 450V

RS Stock No.: 910-6788

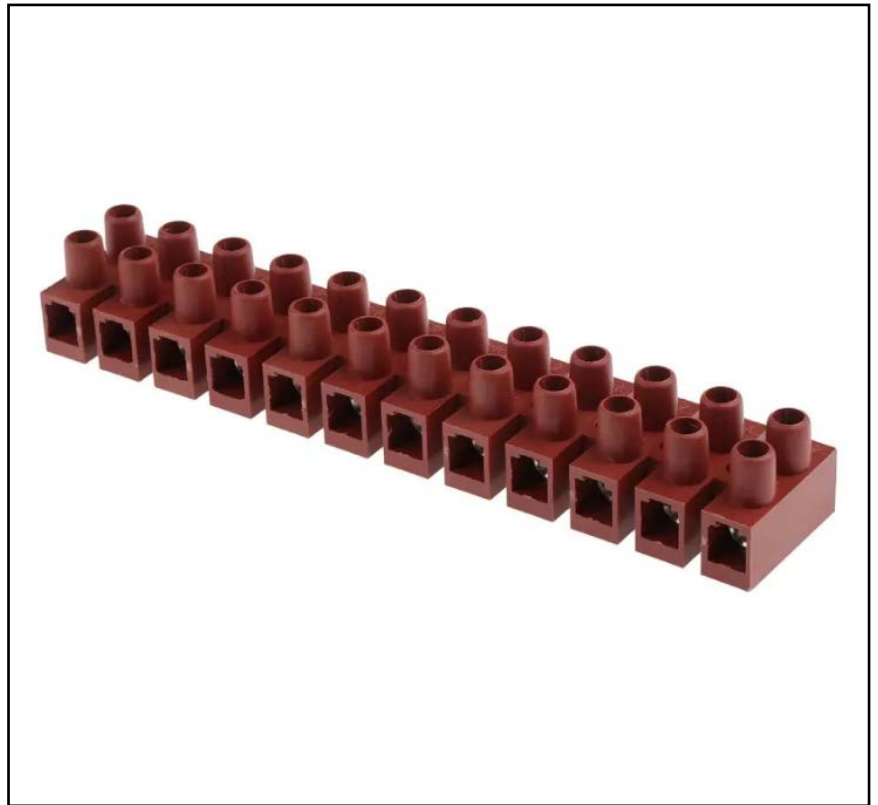

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description

From RS PRO, this non-fused terminal block presents a reliable and cost-effective solution to wire-to-wire connections. It features a glass reinforced nylon body that is highly durable for more robust applications.

## General Specifications

<b>Fused</b>	No
<b>Mounting Type</b>	Surface Mount
<b>Contact Material</b>	Brass
<b>Termination Method</b>	Screw
<b>Contact Plating</b>	Nickel
<b>Colour</b>	Red/Brown
<b>Material</b>	Glass Fibre Reinforced, Polyamide
<b>Number of Ways</b>	12
<b>Applications</b>	Connecting lighting to switches, Connecting wiring to a ground, HVAC Systems, Power Supplies

## Electrical Specifications

<b>Current Rating</b>	76A
<b>Voltage Rating</b>	450V

## Mechanical Specifications

<b>Cable CSA</b>	16mm <sup>2</sup>
<b>Dimensions</b>	173.5mm x 32.2mm x 25mm
<b>Height</b>	25mm
<b>Width</b>	32.2mm
<b>Length</b>	173.5mm
<b>Pitch</b>	14.5mm

## Operation Environment Specifications

<b>Maximum Operating Temperature</b>	150°C
--------------------------------------	-------

## Approvals

<b>Standards Met</b>	RoHS Compliant, EN60695-2-11
----------------------	------------------------------

