

550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

**RoHS
Compliant**



Features

- Universal 90V AC to 264V AC or 127V DC to 370V DC input voltage
- Operating ambient temperature range: -40°C to +70°C
- Built-in active PFC function
- Output short circuit, over-current, over-voltage protection, over-temperature protection
- 320W with air cooling, 550W with 25CFM
- 5V DC Standby Output, 12V DC fan supply
- PG signal and remote sensing function
- Safety according to medical certification, suitable for BF application
- The base plate with conformal coating
- Operating Altitude upto 5000m

These series is one of enclosed AC-DC switching power supply and suitable for all kinds of BF type (be accessible to patients) medical system equipment. It features universal AC input and at the same time accepts DC input voltage, cost-effective, lowload power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN/UL62368, GB4943, IEC/EN60335, IEC/EN61558, IEC/EN/ES60601-1 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home, etc.

Selection Guide

Certification	Part Number	Cooling Method	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output adj. Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (µF)
UL/EN	MPOF550-20B12-C	Air cooling	309.6	12V/25.8A	11.4-12.6	91	6000
		25CFM	499.2	12V/41.6A			
UL/EN	MPOF550-20B24-C	Air cooling	309.6	24V/12.9A	22.8-25.2	93	
		25CFM	549.6	24V/22.9A			
	MPOF550-20B48-C	Air cooling	312	48V/6.5A	45.6-50.4	94	2000
		25CFM	550	48V/11.46A			
UL/EN	MPOF550-20B12-CF	Forced air cooling	499.2	12V/41.6A	11.4 -12.6	91	6000
UL/EN	MPOF550-20B24-CF		549.6	24V/22.9A	22.8 - 25.2	93	
	MPOF550-20B48-CF		550	48V/11.46A	45.6 - 50.4	94	2000

Note: 1.*Under any conditions, the total power of the product should not exceed the rated power. When the output voltage is increased, the total output power cannot exceed the rated output power, when the output voltage is decreased, the output current cannot exceed the rated output current;
 2. *When measuring the full load efficiency, the fan should be connected to an external power supply. Fan loss is not included in the input power.
 3.*MPOF Products with shell is also available.
 4.*25CFM refers the MPOF550-20BXX-CF series external fan speed, forced air cooling 25CFM refers to the built-in fan speed, which automatically starts when the MPOF550-20BXX-CF series are turned on.

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 sg.element14.com/b/multicomp-pro

multicomp PRO

550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

Input Specifications						
Item	Operating Conditions		Min.	Typ.	Max.	Unit
Input Voltage Range	AC input		90	--	264	V AC
	DC input		127	--	370	V DC
Input Frequency			47	--	63	Hz
Input Current	115V AC		--	--	6.5	A
	230V AC		--	--	3	
Inrush Current	115V AC	Cold start	--	50	--	A
	230V AC		--	80	--	
Power Factor	115V AC	Full Load	0.98	--	--	--
	230V AC		0.95	--	--	
Leakage Current	264V AC 50Hz	Contact leakage curren	<0.1mA			
		Earth leakage current	<0.5mA			
Hot Plug			Unavailable			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy*	Full load	12V/24V	--	±2	--	%
		48V	--	±1	--	
Line Regulation	Rated load		--	±0.5	--	%
Load Regulation	0% - 100% load		--	±1	--	
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)		--	--	200	mV
Temperature Coefficient			--	±0.03	--	%/°C
Minimum Load			0	--	--	%
Hold-up Time	115V AC input		10	-	--	ms
	230V AC input		10	-		
Stand-by Power Consumption	Room temperature, 230V AC input (PS-ON low level)	12V/24V/48V	--	--	0.6	W
Short Circuit Protection	Recover time <10s after the short circuit disappear	12V/24V/48V	Hiccup mode, constant current works 1s, turnoff 10s, continuous, self-recover			
Over-current Protection			≥105%Io, hiccup, self-recover			
Over-voltage Protection	12V		≤15.6V		Output voltage turn off, re-power on for recove	
	24V		≤31.2V			
	48V		≤60.0V			







550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Over-temperature Protection			Protection when over-temperature, recover automatically after the temperature drops.			
Fan Power*			Offer output power of 12V/0.5A			
PS_ON Input Signal*	Power on	PS_ON High	2	--	5	V
	Power off	PS_ON Low	0	--	0.5	
PG Signal*	Power on	The PG signal goes high with 10ms to 500ms delay after power set up	10	--	500	ms
	Power off/Power fail	The TTL signal goes low at least 1ms before output below 90% of rated value	1	--	--	
	High level	High	2	--	6	V
	Low level	Low	0	--	0.6	
Remote Sense*	When RS+ and RS- are connected to the system, with function of remote voltage compensation, if not needed, left RS+ and RS- Open					
5V Standby	5Vsb: The load capacity is 0.6A without fan; the load capacity is 1A with fan 25CFM, tolerance 2%, ripple: 120mVp-p(max.)					
<p>Note: 1.*Output Voltage Accuracy: including setting error, line regulation, load regulation; 2.*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor (Low ESR) and 0.1uF ceramic capacitor. 3.*For fan power connection method, please refer to 5, 6 in the external dimension drawing; 4.*For PS_ON, 5V standby connection method, please refer to CN6 in the external dimension drawing; 5.*For PG standby connection method, please refer to CN2 in the external dimension drawing;</p>						

550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

General Specifications									
Item		Operating Conditions		Min.	Typ.	Max.	Unit		
Isolation Test	Input - output	Electric strength test for 1min., leakage current <5mA		4000	-	--	V AC		
	Input - 			2000		--			
	Output - 			1500		--			
Insulation Resistance	Input - output	Environment temperature: 25 ± 5°C		100	-	--	MΩ		
	Input - 	Relative humidity: < 95%RH, noncondensing		100		--			
	Output - 	Test voltage: 500V DC		100		--			
Isolation level	Input - output			2 × MOPP					
	Input - 			1 × MOPP					
	Output - 			1 × MOPP					
Operating Temperature				-40	-	+70	°C		
Storage Temperature				-40		+85			
Storage Humidity				10		95	%RH		
Operating Humidity				20	90				
Switching Frequency				--		--	KHz		
Power Derating	Operating Temperature derating	MPOF550-20B12-C		+50°C to +70°C	3.1	-	°C		
		MPOF550-20B24/48-CF		+50°C to +70°C	3.25				
		25CFM	MPOF550-20B12-C		+50°C to +70°C			2.5	
			MPOF550-20B24/48-C		+50°C to +70°C			2.75	
		Air cooling (250W)	230VAC		+30°C to +40°C		1	--	W/°C
					+40°C to +60°C		5		
			115VAC		+30°C to +50°C		4.5		
					+50°C to +60°C		6		
	Input voltage derating	90V AC - 115V AC			1		%/VAC		
		127V DC -160V DC			0.76		%/VDC		
Safety Standard		12V/24V/48V		UL62368-1 safety approved &EN62368-1(Report) Design refer to IEC62368-1, GB4943.1, EN60335-1, IEC/ES/EN60601-1					
Safety Class				CLASS I					
MTBF		MIL-HDBK-217F@25°C		≥200,000 h					

Mechanical Specifications			
Case Material	Metal (AL5052, SUS304)		
Dimensions	130mm × 86mm × 43mm MPOF550-20Bxx-C Series	160mm × 86mm × 43mm MPOF550-20Bxx-CF Series	
Weight	605g (Typ.) MPOF550-20Bxx-C Series	645g (Typ.)	MPOF550-20Bxx-CF Series
Cooling Method*	Air cooling (310W) / 25CFM (500W/550W)		
Note: *Please refer to the product characteristic curve for cooling method and power.			

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

Electromagnetic Compatibility (EMC)


Emissions	CE	EN55032(CISPR32)/EN55011(CISPR11) CLASS B		
	RE	EN55032(CISPR32)/EN55011(CISPR11) CLASS B		
	Harmonic current	IEC/EN61000-3-2 CLASS A and CLASS D		
	Flicker	IEC/EN61000-3-3		
Immunity	ESD	IEC/EN61000-4-2	Contact $\pm 8\text{KV}$ /Air $\pm 15\text{KV}$	Perf. Criteria A
	RS	IEC/EN61000-4-3	10V/m	Perf. Criteria A
	EFT	IEC/EN61000-4-4	$\pm 2\text{KV}$	Perf. Criteria A
	Surge	IEC/EN61000-4-5	line to line $\pm 2\text{KV}$, line to ground $\pm 4\text{KV}$	Perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	Perf. Criteria A
	DIP IEC/EN61000-4-11 0%, 70%	DIP IEC/EN61000-4-11	0%, 70%	perf. Criteria B

Note: 1.*The power Should be considered as part of the components in the system, All EMC performance are been tested on a metal plate with a thickness of 1mm and a length of 360mm x 360mm. The power supply should be combined with the terminal equipment for electromagnetic compatibility confirmation

Product Characteristic Curve


MPOF550-20B12

(full load 500W with 25C FM)

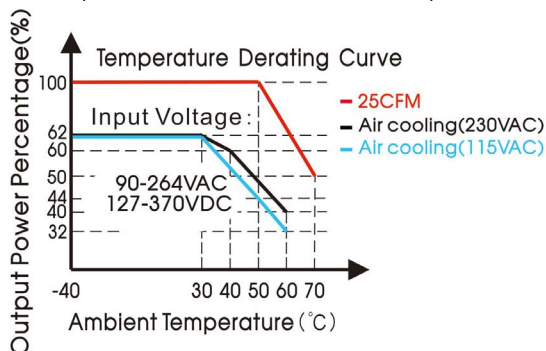


MPOF550-20B24/ MPOF550-20B48

(full load 500W with 25C FM)

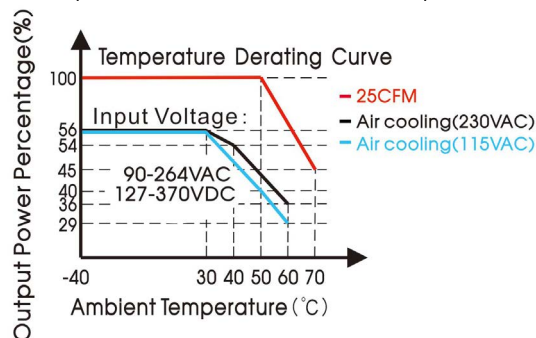


MPOF550-20B12-CF

(full load 500W with 25C FM)

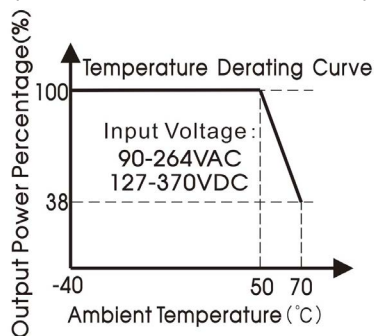


MPOF550-20B24-CF/ MPOF550-20B48-CF

(full load 500W with 25C FM)


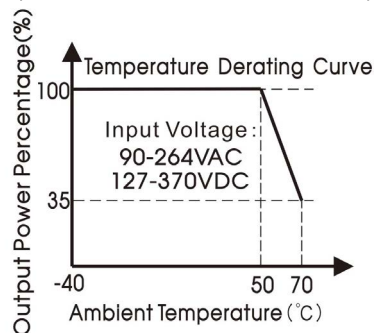


550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

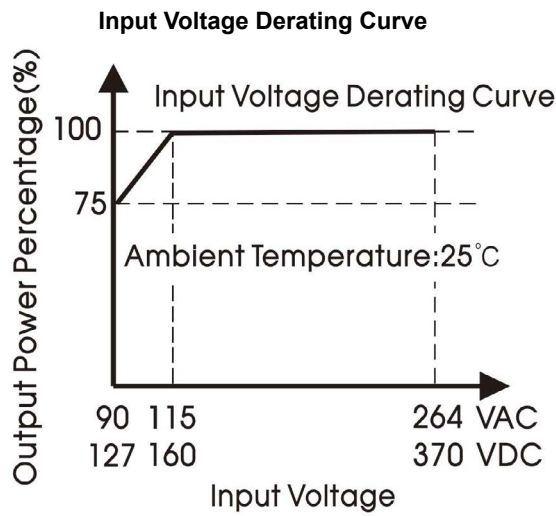

Note: With an AC input voltage between 90 - 115V AC and a DC input between 127 - 160V DC the output power must be derated as per the temperature derating curves

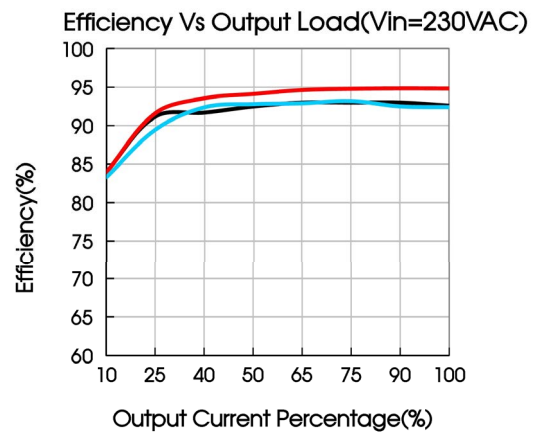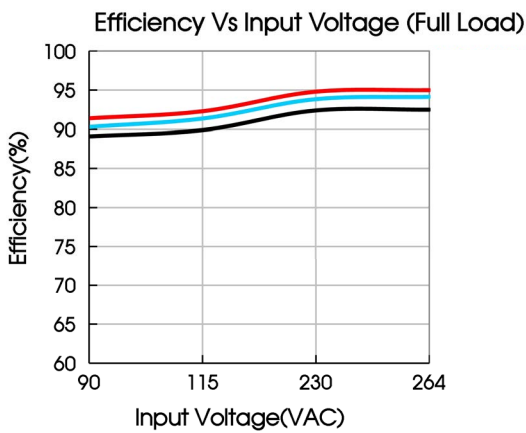


multicomp PRO

550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

Dimensions and Recommended Layout

MPOF550-20Bxx-C Series

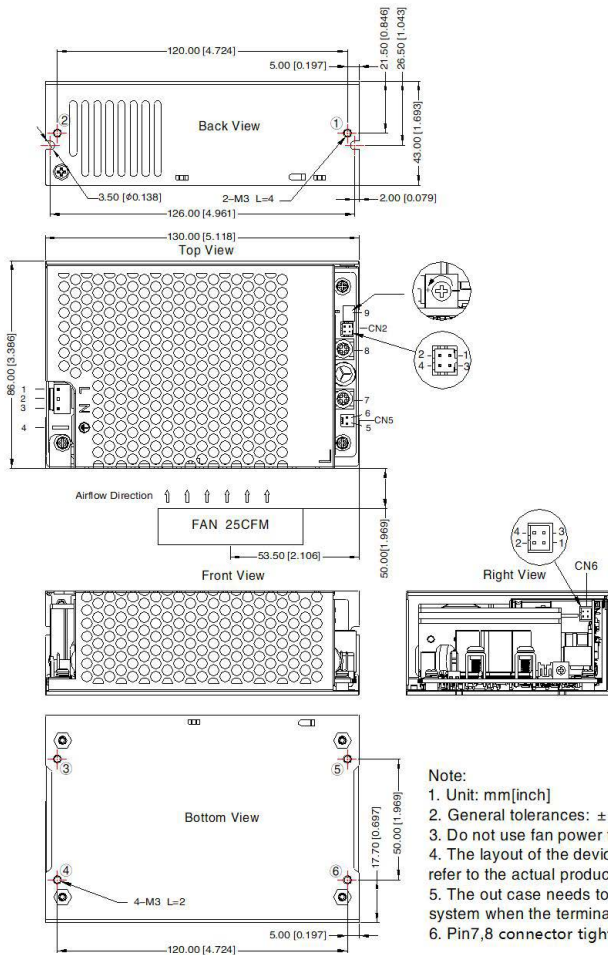

THIRD ANGLE PROJECTION

Pin-Out		Customer Connector
Pin	Mark	
1	AC(L)	Housing: JST VHR or equivalent Contact: JST SVH-21T-P1.1 or equivalent
2	NC	
3	AC(N)	Contact: JST SPS-21T-250
4		
5	FAN+	CN5: Fan power output port Housing: TKP 2502 or equivalent Contact: TKP 8811 or equivalent
6	FAN-	
7	+Vo	
8	-Vo	
9	ADJ Output adjustable resistor	

4-3-1 CN6: PS_ON signal input port(3-4)
2-1-1 5VDC Standby output(1-2)


Pin-Out		Customer Connector
Pin	Mark	
1	+5V	Housing: JST PHD-2*2Y or equivalent Contact: JST PHD-TE or equivalent
2	GND	
3	PS-ON	
4	GND	

2-1-1 CN2: Remote sensing signal input port(1-2)
4-3-1 PG signal(3-4)

Pin-Out		Customer Connector
Pin	Mark	
1	RS-	Housing: JST PHD-2*2Y or equivalent Contact: JST PHD-TE or equivalent
2	RS+	
3	GND	
4	PG	

Position	Screw Spec.	L(max)	Torque(max)
①-②	M3	4mm	0.4N·m
③-⑥	M3	2mm	0.4N·m

- Note:
- Unit: mm[inch]
 - General tolerances: $\pm 1.00[\pm 0.039]$
 - Do not use fan power to power other devices
 - The layout of the device is for reference only, please refer to the actual product
 - The out case needs to be connected to the earth of system when the terminal
 - Pin7,8 connector tightening torque: M4, 1.2N·m(max)




multicomp PRO

550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

MPOF550-20Bxx-CF Series

THIRD ANGLE PROJECTION

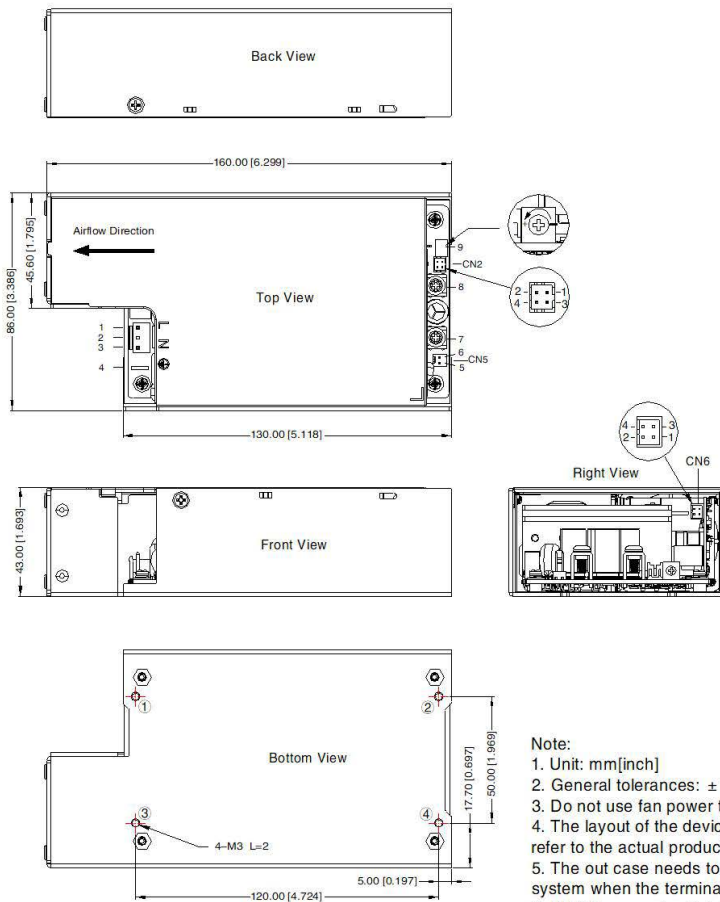



Pin-Out		Customer Connector
Pin	Mark	
1	AC(L)	Housing: JST VHR or equivalent Contact: JST SVH-21T-P1.1 or equivalent
2	NC	
3	AC(N)	
4		Contact: JST SPS-21T-250
5	FAN+	CN5: Fan power output port Housing: TKP 2502 or equivalent Contact: TKP 8811 or equivalent
6	FAN-	
7	+Vo	
8	-Vo	
9	ADJ Output adjustable resistor	

Pin-Out		Customer Connector
Pin	Mark	
1	+5V	Housing: JST PHD-2*2Y or equivalent Contact: JST PHD-TE or equivalent
2	GND	
3	PS-ON	
4	GND	

Pin-Out		Customer Connector
Pin	Mark	
1	RS-	Housing: JST PHD-2*2Y or equivalent Contact: JST PHD-TE or equivalent
2	RS+	
3	GND	
4	PG	

Position	Screw Spec.	L(max)	Torque(max)
①-④	M3	2mm	0.4N·m

- Note:
- Unit: mm[inch]
 - General tolerances: $\pm 1.00[\pm 0.039]$
 - Do not use fan power to power other devices
 - The layout of the device is for reference only, please refer to the actual product
 - The out case needs to be connected to the earth of system when the terminal
 - Pin7,8 connector tightening torque: M4, 1.2N · m(max)

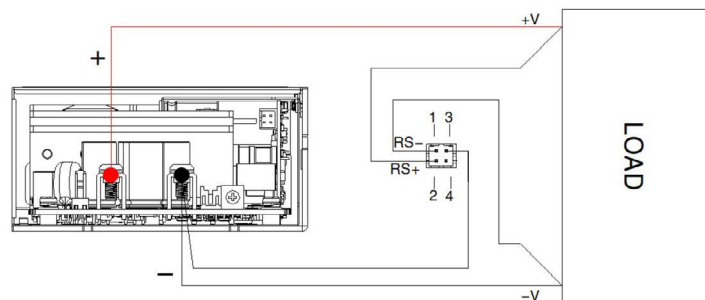

Remote sensing function wiring diagram

Note:

- RS- and RS+ cannot be shorted or reversed, otherwise the power module will be damaged;
- The remote compensation function can compensate the voltage drop on the output cable, which includes the sum of the cable drop connected to the output positive terminal and the output negative terminal;
- If you need to use remote compensation function, the signal pin needs to be connected with the load and with a twisted pair

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO

550W AC-DC Enclosed Switching Power Supplies

multicomp PRO

Notes:

1. Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75%RH with nominal input voltage and rated output load;
2. In order to improve the efficiency, there will be audible noise generated when work at light load, but it does not affect product performance and reliability;
3. The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
4. CAUTION: Double pole, neutral fusing. Disconnect mains before servicing."/"ATTENTION: Double pôle/fusible sur le neutre. Débrancher l'alimentation avant l'entretien;
5. Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
6. The power supply is considered a component which will be installed into a terminal equipment.

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
sg.element14.com/b/multicomp-pro

multicomp PRO