

Acision HTC7630 Handheld Thermal Camera




Acision HTC7630 is a camera with both optical images and thermal images. The built-in high-sensitivity IR detector and high-performance sensor detects the temperature change and measure the real-time temperature.

The temperature measurement range is $-20\text{ }^{\circ}\text{C}$ to $550\text{ }^{\circ}\text{C}$ ($-4\text{ }^{\circ}\text{F}$ to $1022\text{ }^{\circ}\text{F}$) with accuracy $\pm 2\text{ }^{\circ}\text{C}$ or 2%.

Key Features:

- Thermal resolution: 384 x 288 (110, 592 pixels)
- NETD : $< 35\text{mK}$ (@ $25\text{ }^{\circ}\text{C}$)
- Temperature measurement range : $-20\text{ }^{\circ}\text{C}$ to $550\text{ }^{\circ}\text{C}$
- Accuracy: Max ($\pm 2\text{ }^{\circ}\text{C}$ or $\pm 2\%$)
- Measurement Presets: Center spot, Hot spot, Cold spot, User Preset Point/Line/Area
- Manual focus
- 25 Hz image frequency
- 3.5" LCD touch screen display

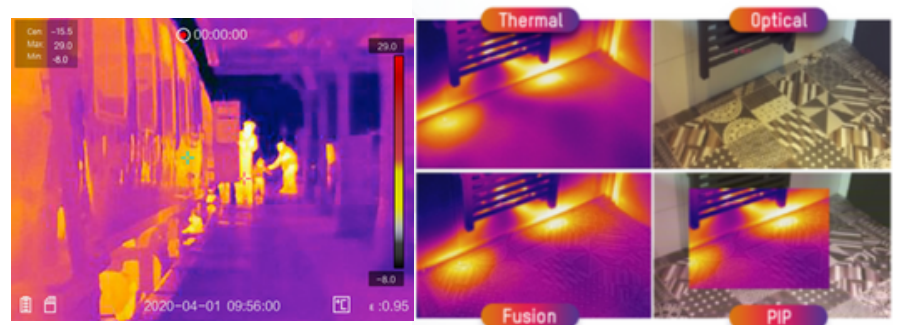

Contact your Authorised Acision Distributor:

CE-Test & Measurement (S) Pte Ltd
 19 Kallang Ave #02-159 Singapore 339410
 T: 6292-5161
 Email: sales@cetm.com.sg
 Website: www.cetm.com.sg

Acision HTC7630 Handheld Thermal Camera



ACISION™

Thermal Module	
Image Sensor	Vanadium Oxide Uncooled Focal Plane Arrays
IR Resolution	384 × 288 (110 592 pixels)
Pixel Pitch	17 µm
Spectral Range	8 - 14 µm
NETD	< 35mK (@ 25 °C)
Focal Length	10 mm
FOV (Field of View)	37.5° × 28.5 °
Image Frequency	25 Hz
Focus	Manual
IFOV (Spatial Resolution)	1.7mrad
Aperture	F1.0
Optical Module	
Picture Resolution	Configurable: 2 MP, 5 MP, 8 MP
Video Resolution	640 × 480
Focus	Fixed
FOV	37.5° × 28.5 °
Image Display	
Display	640 × 480 Resolution, 3.5" LCD Touch Screen
Color Palettes	White Hot, Black Hot, Rainbow, Ironbow, Red Hot, Fusion, Rain
Digital Zoom	1x, 2x, 4x, 8x
Image Modes	Thermal/Optical/Fusion/PIP
PIP	Thermal Picture in Optical Picture
Fusion	Thermal Picture and Optical Picture Combined
Measurement and Analysis	
Object Temperature Range	-20 °C to 550 °C (-4 °F to 1022 °F)
Accuracy	Max (±2 °C, ±2%)
Measurement Presets	Center Spot, Hot Spot, Cold Spot, Off
Point	10 User Presets
Line	1 User Preset
Area	3 User Presets
High Temperature Alarm	Audible Warning
Color Alarm (Isotherm)	Above/Below/Interval/Insulation
Storage	
Storage Media	Removable Micro SD Card (64 GB)
Image Storage Capacity	120 000 Images
Image File Format	JPEG with Measurement Data Included
Video Storage Capacity	56 Hours
Video File Format	MP4

Contact your Authorised Acision Distributor:

CE-Test & Measurement (S) Pte Ltd
 19 Kallang Ave #02-159 Singapore 339410
 T: 6292-5161
 Email: sales@cetm.com.sg
 Website: www.cetm.com.sg



Acision HTC7630 Handheld Thermal Camera



Function	
Laser Pointer	Yes
Laser Type	Class II
LED Light	70 Lumens
Wi-Fi	802.11 a/ac/b/g/n (2.4 and 5 GHz)
Bluetooth	Bluetooth 4.2
Level/ Span	Auto/ Manual
Text Comment	Max 200 Characters
Voice Comment	Max 60 Seconds
Power	
Power Supply	12 V DC/1.5A, 5V DC/2A (Charging via USB)
Power Consumption	4.6 W
Battery Type	Dismountable and Rechargeable Li-ion Battery
Battery Operating Time	4 Hours Continuous Running
General	
Menu Language	18 Languages English/German/French/Russian/Korean/Spanish/Portuguese/Italian/Japanese/Hungarian/Czech/Slovak/Polish/Romanian/Danish/Turkish/Traditional_Chinese/Arabic
Working Temperature Range	-20 °C to 50 °C (-4 °F to 122 °F)
Storage Temperature Range	-20 °C to 60 °C (-4 °F to 140 °F)
Protection Level	IP54
Drop Test Height	2 m (6.56 ft)
Interface USB	Type-C
Weight Approx.	660 g (1.46 lb)
Dimension	244 mm × 100 mm × 104 mm (9.6 " × 3.9 " × 4.1 ")
Tripod Mounting	UNC ¼"-20

Contact your Authorised Acision Distributor:

CE-Test & Measurement (S) Pte Ltd
19 Kallang Ave #02-159 Singapore 339410
T: 6292-5161
Email: sales@cetm.com.sg
Website: www.cetm.com.sg