


309 LEDGEND™ Square

Patented


FEATURES

- Unique support ledge
- High-impact polymer handle
- Permanently etched stainless steel blade
- 22.5°, 45°, 67.5° and 90° angles for beveling and framing
- Inch/cm gradations or cm/cm
- Certified 90°
- Marking point






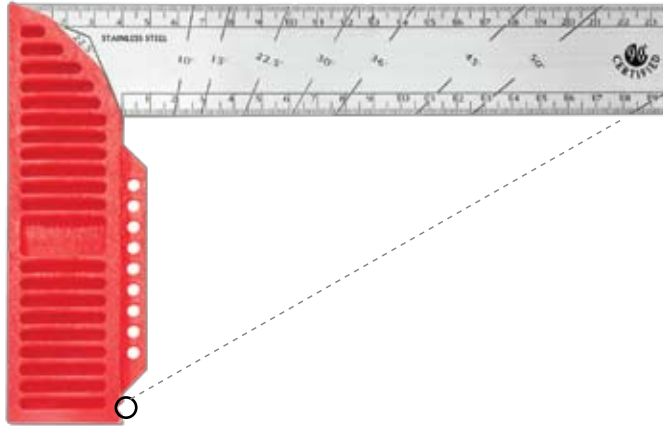

	
8" (20cm)	140gr
10" (25cm)	180gr
12" (30cm)	215gr
16" (40cm)	250gr



www.kapro.com



309 LEDGEND™ Square

		 unit	 in/cm	 ft ³ /cm ³	 lb/kg	 EAN	 UPC
309-20	8" (20cm)	6 units	8" x 6.4" x 5.4" 20 x 16 x 13.5cm	0.17 ft ³ 0.005 m ³	03.2 lb 1.5 kg	7396320000268	739632000095
309-25	10" (25cm)	6 units	10" x 6.4" x 5.4" 25 x 16 x 13.5cm	0.18 ft ³ 0.005 m ³	4.4 lb 2.0 kg	7396320000336	739632000033
309-30	12" (30cm)	6 units	12" x 6.4" x 5.4" 30 x 16 x 13.5cm	0.19 ft ³ 0.006 m ³	5.0 lb 2.3 kg	7396320000404	739632000057
309-40	16" (40cm)	6 units	16" x 6.4" x 5.4" 40 x 16 x 13.5cm	0.2 ft ³ 0.007m ³	6.2lb 2.8 kg	7396320001234	739632000507

