



ENGLISH

Datasheet Foot Switch in Polymeric Housing

RS Article No.125-3709





Specifications:

Operating Frequency:	60 ops/min
Insulation Resistance:	>100 MΩ@500 V dc
Contact Resistance:	<25 mΩ(initial)
Rated Current/Voltage:	15 A, 1/2HP, 125/250 V ac
Dielectric Strength:	1000 V ac for 1 min between current carrying parts 2500 V ac for 1 min between non-current carrying parts
Service Life:	Mechanically 1×10^6 Electrically 5×10^5
Operating Temperature:	-20 ~ +80°C (-4 ~ 176°F)
Degree of Protection:	IP20
Size (L x W x H):	100 x 75 x 33 mm

Features:

- Robust glass fiber reinforced plastic
- UL/CSA/CE Certified
- Galvanically separated contacts
- SPDT TYPE
- Maintained type (Push-on/push-off)

Dimensions:

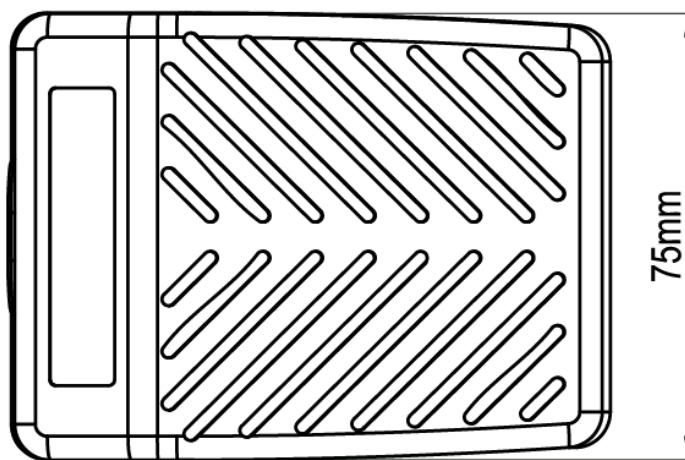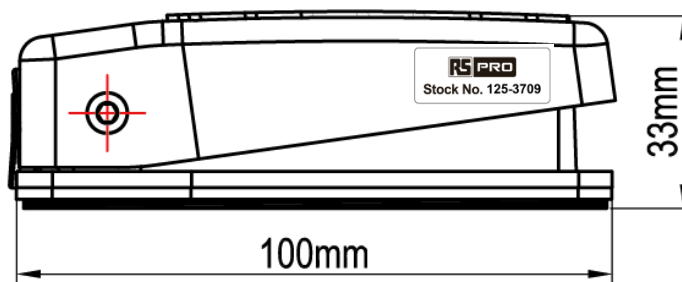

Wiring Drawing:

