


# RS PRO Miniature Micro Switch

RS STOCK NUMBER - 2496854

## FEATURES

- VERSATILE SWITCH SUITABLE FOR HEAVY DUTY APPLICATIONS.
- COMPATIBLE WITH ALL INDUSTRY STANDARD V3 SWITCHES.
- LONG MECHANICAL AND ELECTRICAL LIFE.
- CONFORM TO IEC 1508-1 STANDARD

-  /  /  APPROVED.

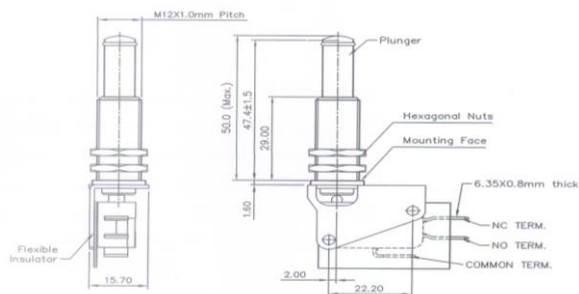

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

## Product Description ATTRIBUTE 1

- *V3 switches are ideal for many heavy-duty applications including automotive vending machines, telecommunication equipment, security products and instrumentation, conveyors, machine tools.*
- *Positive snap action mechanism.*
- *Spring plunger actuator and a screwed sleeve which provides the means for single hole mounting and adjustment.*
- *Quick connect terminals 6.35mm(#250).*
- *Long mechanical and electrical life.*
- *Fine silver contacts.*

## General Specifications

<b>Contact Configuration</b>	SPDT.
<b>Contact Arrangement</b>	1No + 1NC, snap action.
<b>Contacts</b>	Pure silver, bi-metal, silver plated.
<b>Terminals</b>	Copper alloy, silver plated.
<b>Plunger</b>	Nylon.
<b>Case</b>	30% Glass filled flame retardant thermoplastic UL94 V0.
<b>Saliant Feature</b>	Spring plunger actuator and a screwed sleeve which provides the means for single hole mounting and adjustment. 6.35X0.8mm quick-connect terminals.

## Electrical Specifications

Electrical Rating		
	Load	Rating
	<b>AC-15</b>	16 Amp at 250V.
		5 Amp at 440V.
	<b>DC-13</b>	0.6 Amp at 110V (Resistive).
		0.3 Amp at 220V (Resistive).
		0.1 Amp at 110V (Inductive).
		0.05 Amp at 220V (Inductive).
<b>Contact Resistance</b>		15 milliohms max. (initial).
<b>Insulation Resistance</b>		100 Megaohms (min.). at 500V DC.

<b>Voltage Proof</b>	1500V AC between each shorted terminal with body and 1000V AC between open contacts.
<b>Electrical life</b>	1,00,000 operations at 5A, 250V AC.
<b>Mechanical life</b>	10,00,000 operations.

## Mechanical Specifications

<b>Operating Force (OF)</b>	400gms. (max).
<b>Release Force(RF)</b>	80gms.(min.).
<b>Pretravel (PT)</b>	1.2 mm. (max.).
<b>Movement Differential (MD)</b>	0.4 mm. (max.).
<b>Overtravel (OT)</b>	12.1 mm.
<b>Free Position (FP)</b>	50.0 mm. (max.).
<b>Operating Position (OP)</b>	47.4±1.5 mm.
<b>Mounting</b>	Single-hole mounting require a single clearance hole of 12.5mm diameter. Two locknuts provided.
<b>Unit Weight</b>	39.2gms. Approx.

## Operation Environment Specifications

<b>Operating Temperature Range</b>	-55°C to + +85°C.
------------------------------------	-------------------

## Protection Category

<b>IP Rating</b>	IP40.
------------------	-------

## Approvals

<b>Compliance/Certifications</b>	
----------------------------------	---