



NO	DESCRIPTION	DATE
△	ADD MIS PART NO.	04.01.04
△	ADD DESCRIPTION ADD 6.2±0.38 ADD 1.98±0.38 61.12±0.13 → 61.12±0.25 52.43±0.13 → 52.43±0.25 #3.05 → #3.05±0.25 15.4 REF. → 15.37±0.38 2.77 → 2.77±0.38 55.32 REF. → 55.3±0.38 1 → 0.76±0.25 13.6 REF. → 13.57±0.38 11 REF. → 10.85±0.38 3.3 REF. → 2.4±0.5 2.84 → 2.84±0.38 TIN → GOLD MIS PART NO. → P/N	03.17.08
△	1.98±0.38 → 2.84±0.38 6.2±0.38 → 6.4±0.38	12.02.11
△	GOLD	05.16.13

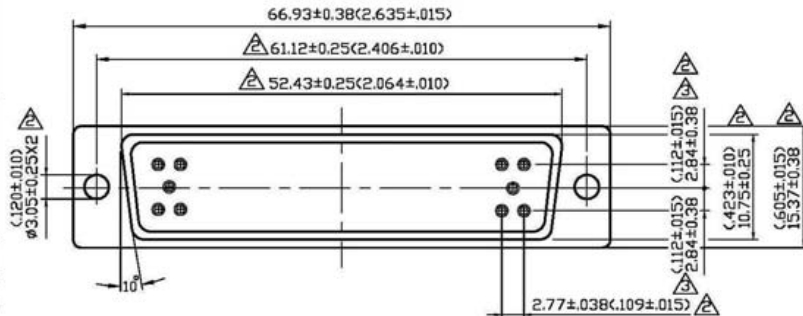

CONTACT TYPE  
COLOR OF INSULATION  
PLATING OF CONTACT  
SOLDER TERMINATIONS  
WORKING VOLTAGE  
CONTACT RESISTANCE  
MATING CYCLES

MACHINED CONTACT  
BLACK PBT  
GLASSFIBRE REINFORCED  
△ GOLD  
△ GOLD  
500V AC AT SEA LEVEL  
10m OHM MAX.  
150 TIMES

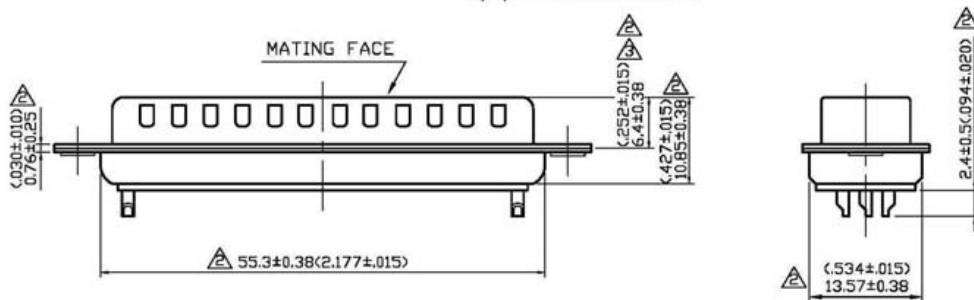

△ △ P/N: 544-3935

APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_



△ DESCRIPTION D-SUB WITH 50-PIN FEMALE CONNECTOR BY MACHINING									
製圖	DRAWN	TOLERANCE	品名	050-0050S-M	日期	DATE	版次	REV.	
檢圖	CHECK	X ±0.2	TITLE	ROHS COMPLIANT	02.23.95			A-4	
檢圖	Ivan	.XX ±0.1	單位	mm(in)	DWG.NO.	55-0061			
認定	APPROVAL	.XXX ±0.05	比例	SCALE					
	Angela	ANGLE ±5°	比例	2:1					