



Manual lever action and rotary drum pumps, made of carbon steel with components in aluminium.
Main fields of application: transfers and dispenses of small quantities of oil or diesel from drums.

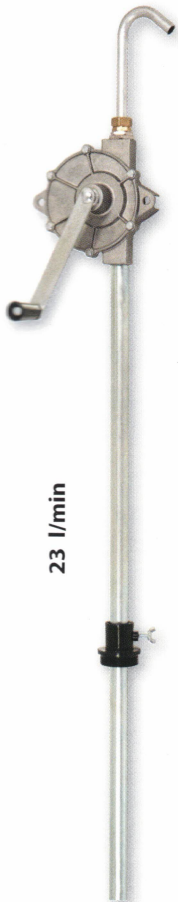

23 l/min

Art.no. 5300

new

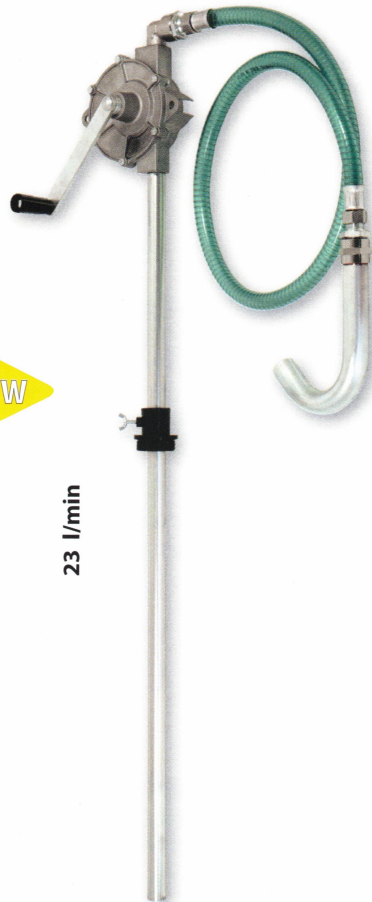

23 l/min

Art.no. 5300/FD



12 l/min

Imported Article

Art.no. 5409




9 l/min - 13.5 l/min

Art.no. 5400
Art.no. 5450

new

25 l/min

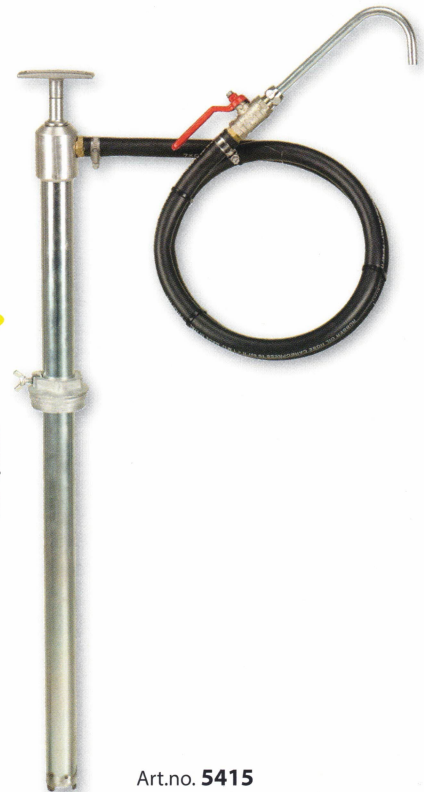

Art.no. 5415

Suitable especially for use with gear oils up to SAE 140.

Art. no.	5409	5415	5300 5300/FD	5400	5450
Delivery	12 l/min	25 l/min	23 l/min	9 l/min	13.5 l/min
Delivery/stroke (rotation)	0.25 l		0.32 l	0.11 l	0.40 l
Connection lubricant outlet	3/4" BSP (M)	Hose tail Ø 20 mm			
Length suction tube	1000 mm	650 mm	1000 mm		
Dimensions LxWxH (mm)	100x100x944		300x220x1070	100x100x944	120x120x1110
Suitable for drums of	60/208 l	60 l	208 l		
Weight	1.8 kg		3.8 kg	1.3 kg	2.2 kg

The a. m. performance values are based upon the following test conditions: Hydraulic oil ISO 68 at 22°C -- free flow outlet