

FEATURES

- Red, nylon-insulated spade connector
- Male connector
- Wire size range of 0.5 mm² to 1.5 mm², 22 AWG to 16 AWG
- Tab size of 0.8 mm x 4.75 mm
- Length of 20 mm
- Unshrouded
- Crimp termination method
- Brass, copper contacts

RS PRO Red Insulated Spade Connector, 4.75 x 0.8mm Tab Size, 0.5mm² to 1.5mm²

RS Stock No.: 267-4439



RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.

Product Description

The design of this spade connector from RS PRO lets you make connections and disconnections quickly, as no soldering is required. The connector is made to fit 4.75 mm receptacles. The flared design of the nylon insulation lets you insert wires into the terminal more easily. Designed for crimp termination of wires ranging in size from 0.5 mm² (22 AWG) to 1.5 mm² (16 AWG), it creates reliable joints that are mechanically strong.

General Specifications

Insulation	Insulated
Gender	Male
Orientation	Straight
Shrouded/Unshrouded	Unshrouded
Insulation Material	Nylon
Termination Method	Crimp
Connector Type	Tab
Contact Plating	Tin
Contact Material	Brass, Copper
Colour	Red
Applications	Used in domestic appliances, like dishwashers and washing machines

Mechanical Specifications



Minimum Wire Size 1.5mm ²	0.5mm ²
Maximum Wire Size	1.5mm ²
Tab Size	4.75 x 0.8mm
Minimum Wire Size (AWG)	22AWG
Maximum Wire Size (AWG)	16AWG
Tab Thickness	0.8mm
Tab Width	4.8mm
Overall Length	20mm

Approvals

Compliance/Certifications

EN61340



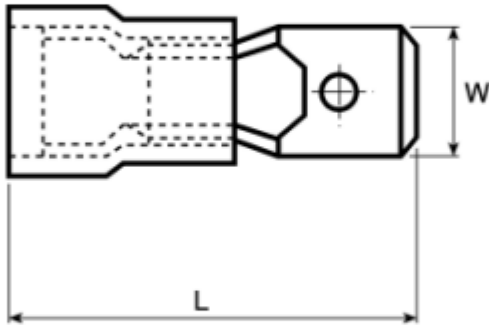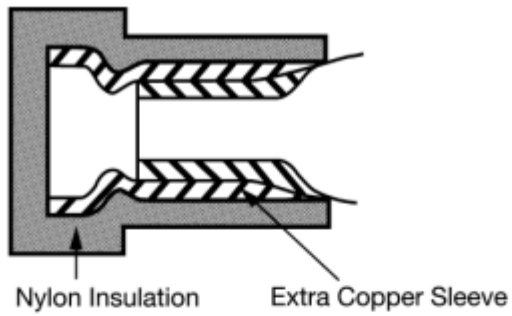

Type	Red		Blue		Yellow	
	W	L	W	L	W	L
Size A	6.4	21.7	6.4	21.7	6.4	24.0
Size B	4.8	19.7	4.8	19.7		
Size C	4.8	19.7	4.8	19.7		