




ENGLISH

Datasheet

146-4648

RS PRO NETWORK IR BULLET CAMERA(1080P)

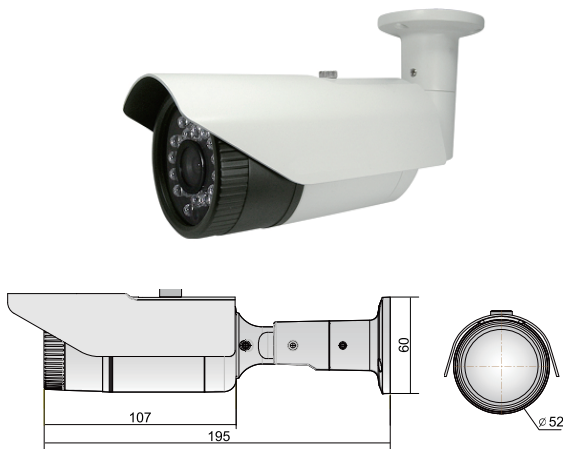

Feature

- Sony Exmor 2MP Image Sensor
- Triple Codec (H.264/MPEG4/MJPEG)
- Triple Stream
- Support Onvif latest version
- Support POE
- True Day & Night
- 24 IR LEDs
- Mega 3.6mm Fixed Lens

CAMERA SECTION

IMAGE	Image Sensor	Sony Exmor 2.07MP Image Sensor
	Scan System	Progressive Scan
	Total Pixels	2000(H)×1121(V) 2.24MegaPixles
	Effective Pixels	1984(H)×1105(V) 2.19MegaPixles
Function	Day & Night	Auto/Day(Color)/Night(BW)
	Privacy	Area On/Off (6 Programmable Zone)
	WDR	DWDR (1~5Step)
	3D DNR	ON / OFF
	Motion Detector	432 Zone (On/Off, 1~5Step)
	Elec. Shutter	Auto(1/30~1/10000), Suppress Rolling, Manual
	White Balance	Auto/Indoor/Outdoor/Fluorescent
	Ext. Video	VBS1.0Vp-p
Lens	Focal Length	3.6mm FIXED LENS
IR LEDs	IR LEDs	24pcs
Electrical	Power Supply	DC12[V] ±10% / POE Current Max 750mA
Environmental	Operating Temp.	-10°C ~ +40°C
	Preservation Temp.	-20°C ~ +50°C
	Humidity	0% ~ 80%
Mechanical	Weight	Approx. 800g

NETWORK SECTION

System	OS	Embedded Linux
Network	Interface	RJ45 100/100 Base-T PoE
	Protocol	TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP,SMTP,DNS,DDNS
	Onvif	Ver2.4
	DDNS	iplinker.net
Video	Simultaneous Access	Max. 10 user
	Compress Format	H.264/MPEG4/MJPEG
	Resolution	1920×1080/1280×720/640×360/ 320×180
	Frame rate	5fps ~ 30fps @ all resolution
	Video Quality	H.264,MPEG4 : Bit rate Control MJPEG : Quality Level Control
Audio	Streaming	Triple Stream (Stream1,2,3) RTP/RTSP, UnicastRTP, Multicast RTP
	Compress Format	G.711 u-law
Event	Streaming	Two way
	Sensor In	1 (Digital Input)
	Alarm Out	1 (Digital Output, Open Collector)
Web Browser	Manager	IE, Firefox, Safari, Opera
	Viewer	IE over 10ver (Active-X)