


NO	DESCRIPTION	DATE
△1	ADD 4.9 MAX. PANEL	08.01.12'
△2	DEL PROOF VOLTAGE WORKING VOLTAGE → VOLTAGE RATING	01.21.13'
△3	4.9 MAX. PANEL → 5.8 MAX. PANEL	07.09.14'

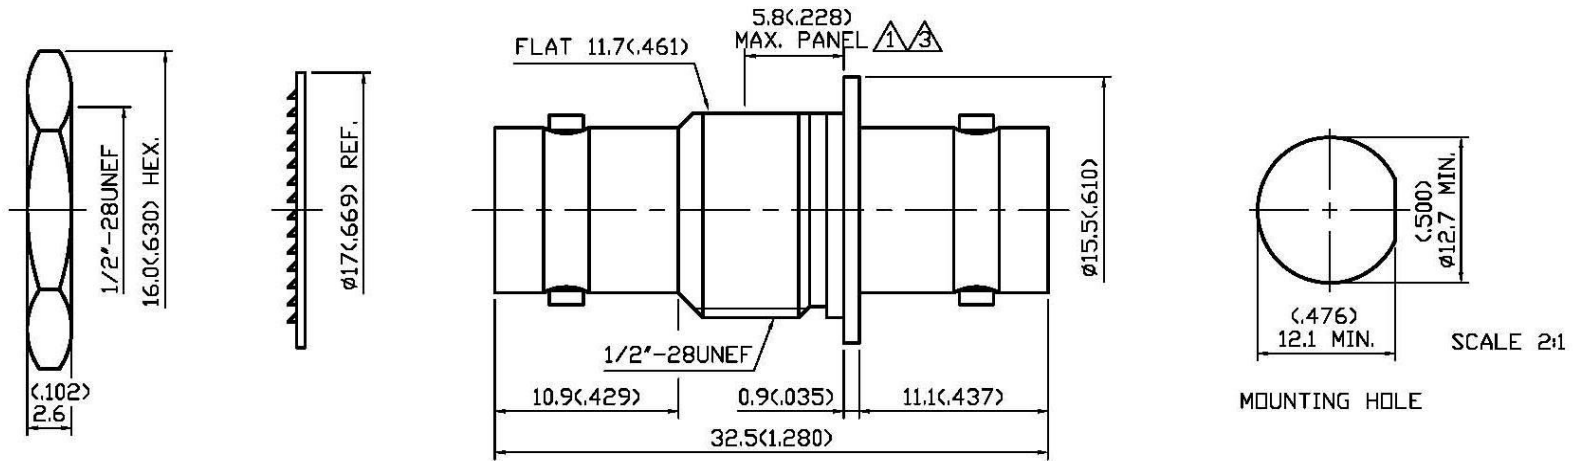

### 1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. △
- 1.4 VSWR: 1.3 MAX.

### 2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196 UNS C17300
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

### 3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.

### 4.0 ENVIRONMENTAL

- 4.1 OPERATING TEMPERATURE RANGE: -85° C TO +185° C

APPROVED

by \_\_\_\_\_ DATE: \_\_\_\_\_

6	INSULATION	TEFLON	2	NONE
5	CENTER CONTACT	BERYLLIUM COPPER	1	SILVER 70 μ" MIN.
4	BODY	BRASS	1	SILVER 70 μ" MIN.
3	WASHER	BRASS	1	SILVER 70 μ" MIN.
2	WASHER	STEEL	1	SILVER 70 μ" MIN.
1	NUT	BRASS	1	SILVER 70 μ" MIN.
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH



DESCRIPTION		STRAIGHT BNC BULKHEAD JACK-JACK ADAPTER						
製圖	DRAWN	TOLERANCE	品名	13-29-1 T.S.S	日期	DATE	版次	REV.
	Yoko		TITLE	\ROHS COMPLIANT <50Ω>		11.17.92'		B-3
檢圖	CHECK	TOLERANCE	單位	mm(in)	DWG.NO.	13-0208		
	Arc		比例	SCALE		3:1		
認定	APPROVAL	ANGLE	±5°					
	Jenny							