



Datasheet

5mm Pitch Low Profile Terminal Block

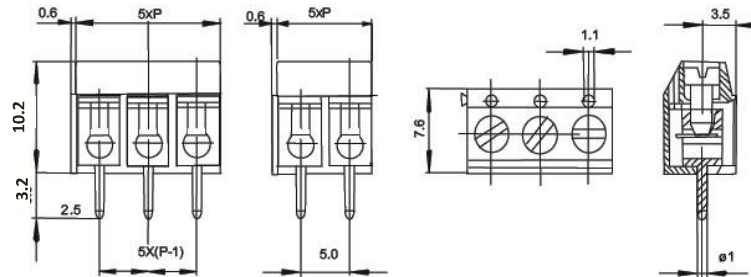

TYPE NO.	POLES	LENGTH
8970736	2	10mm
8970730	3	15mm
8970749	4	20mm
8970742	5	25mm
8970746	6	30mm
8970755	7	35mm
8970758	8	40mm
8970752	9	45mm
8970761	10	50mm
8970764	11	55mm
8970768	12	60mm

- 2-12 pole interlocking
- Professional rising clamp terminals
- Moulded in green UL94-V0 Flame retardant PA66
- 0.32-3.3 mm² (22-14 AWG)
- Guided pin alignment
-  US approved

SPECIFICATION

Rating	16A/250V
Insulation resistance	5000MΩ/1000V
Withstand Voltage	AC1500V/1min
Contact Resistance	20mΩ (max)
Working Temperature	-33°C to 120+°C
Mouldings	UL94-V0 Flame retardant PA66
Pin/Terminal	Nickel plated brass
Wire Protector	Stainless steel
Screw/Torque	M2.5 Steel, Nickel Plated 0.4Nm
Recommended PCB hole size	Ø1.3mm