

Datasheet

RS PRO UL 1061 Black, 0.2 mm² Hook Up Wire, 100m

Stock No: 2075297



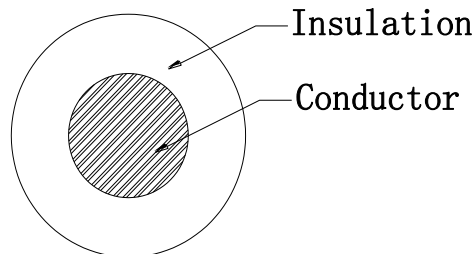
Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	24AWG
Construction(±0.008mm)	7/0.20
Stranded Dia.(mm)	0.61
Insulation Material	SR-PVC
Insulation Color	Black
Ave Thickness(mm)	0.25
Min Thickness(mm)	0.20
Insulation Dia.(±0.10mm)	1.12

Features & Benefits:

- **Rated temperature: 80 °C**
- **Conductor resistance(20°C Ω /km): 86Max.**
- **Insulation DC Resistance(20°C $M\Omega \cdot Km$): 200Min.**
- **Rated Voltage: 300V**

Cross Section drawings



Cable Marking: E254881  AWM STYLE 1061 24AWG
80°C 300V VW-1 C  AWM I A 80°C 300V FT1 -LF- -F-
ELETECK

Applications: It is designed for general applications, for internal appliance wiring