NO	DESCRIPTION	DATE
1	BACKGROUND FORMAT UPDATED	04.27.10'
2	ADD 3.2	01.10.11'

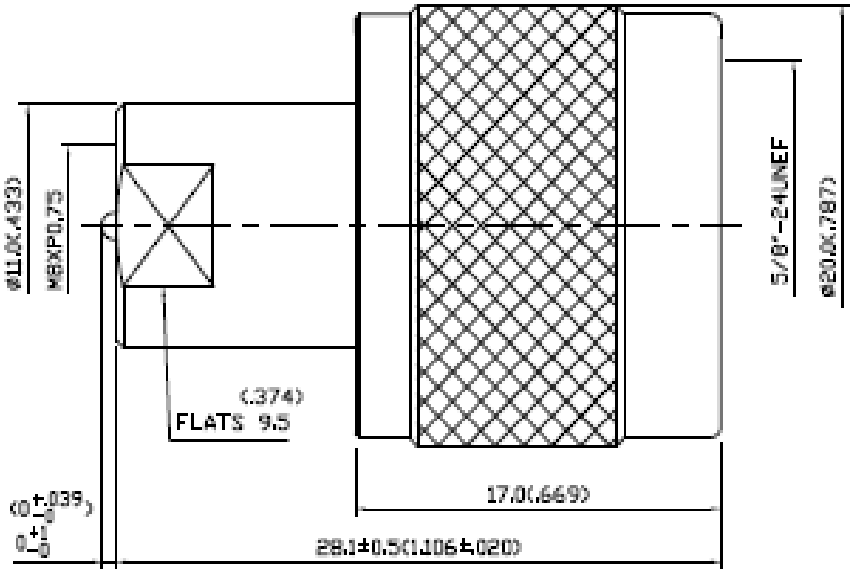

1.0 ELECTRICAL

1.1 FREQUENCY RANGE: DC-900 MHz
1.2 NOMINAL IMPEDANCE: 50 OHM

2.0 MATERIALS

2.1 BODIES: BRASS PER ZS-C3604
2.2 CENTER CONTACT: BRASS PER ZS-C3604
2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.
3.2 AXIAL TORQUE OF CENTER CONTACT: NO APPLICABLE ⚠2

4.0 ENVIRONMENTAL

4.1 OPERATING TEMPERATURE RANGE: -55° C TO +125° C

8	SHELL	BRASS	1	NICKEL 100μ" MIN.
7	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
6	CENTER CONTACT	BRASS	1	GOLD
5	GASKET	SILICONE	1	RED
4	WASHER	BRASS	1	NONE
3	INSULATION	TEFLON	1	NONE
2	INSULATION	TEFLON	1	NONE
1	BODY	BRASS	1	NICKEL 100μ" MIN.
NO	*DESCRIPTION*	*MATERIAL*	*Q'TY*	*FINISH*

APPROVED by _____ DATE _____

DESCRIPTION	FME PLUG - N PLUG								
製圖	DRAWN	TOLERANCE		品名	23-09 T.G.N	日期	DATE	版次	REV.
	Yoko	.X	±0.2	TITLE	\ROHS COMPLIANT (500)		04.27.93		A-2
檢圖	CHECK	.XX	±0.1	單位	UNIT	DWG.NO.	23-0041		
	Jacky	.XXX	±0.05		mm(in)				
核准	APPROVAL	ANGLE	±5°	比例	SCALE				
	Jenny				4:1				