







UFO MaxSaver High Bay



DIMENSIONS



LINE DRAWING

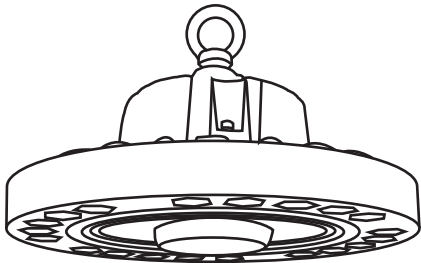

INTENDED USE

Hi-BEAM UFO MaxSaver LED High Bay delivers excellent led performance with 140lm/w for wide different applications such as warehouses, manufacturing, repair or maintenance bays, machining, foundries, indoor swimming pools, gymnasiums, cold storage and automotive to replace traditional T5 or HID solutions.

CONSTRUCTION AND OPTICS

Diecasting aluminium power coated housing. It ease the installation by securing the luminaire by the suspended mount eye bolt then to hook to the c-channel using chain, or bracket. Powder coated housing. Lifespan of 50,000 hours. Operating temperature, -25C-40°C.

SPECIFICATION OF LUMINAIRE

Product Code	Model Code	Watt W	Lumens	Color Temperature	Ø mm	H mm	Weight kg
HBUMSS1006N760000	HBUF100	100W	14000lm	6000K	275	165	2.6
HBUMSM1506N760000	HBUF150	150W	21000lm	6000K	318	176	3.48
HBUMSL2006N760000	HBUF200	200W	28000lm	6000K	355	179	4.36

ORDERING INFORMATION Lead times will vary based on options selected. Consult with your sales representative.
Example: HBUMSS1006N760000.

Type	Fitting Size	Wattage	Optics	Type	CRI	CCTK	Engineering Reserve
HB UFO MaxSaver (HBUMS)	S 275mm	100 100w	*6 60'	N Normal Eye Bolt	7 70	40 4000K	000
	M 318mm	150 150w	9 90'			50 5000K	
	L 355mm	200 200w	12 120'			*60 6000K	

* Common Stock Items

Specifications and dimension subject to change without notice