


Torque wrench - 263

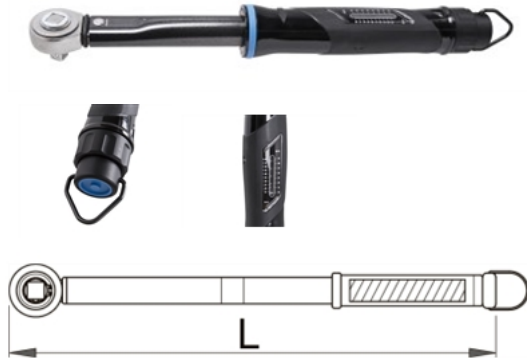

Description

- Accuracy: +/-3%
- micrometer scale for simple and error free settings
- adjustment lock to set torque
- QUICK ADJUSTMENT - Just eight turns to cover the entire scale
- Torque application: bothway, but always apply in direction specified on torque wrench handle
- handle: Two component material
- dual scale lbf.ft and Nm
- Convenient hanger feature for tool storage also aids wrench unlocking and adjustment
- 5° working angle
- Important!
- Do not use torque wrench for untightening!
- Torque tightens only in the direction showed on the key sticker! Sticker shows the proper direction of tightening!
- The default calibration interval of the torque wrench is 12 months or 5.000 measurements from the date of end user purchase.
- ALWAYS set the measuring mechanism to starting point, at the end of work.
- When the requested torque are reached, please do not tight any more.
- Torque wrench can be damaged, if manual instructions are not considered.

Technical Data

Barcode	Nm	lbf.ft	Lenght	Head	Weight	Material	Accessories	Quantity
626765	12 - 60	10 - 45	328	3/8"	700	1S	1	-
626766	40 - 200	30 - 150	459	1/2"	1000	1S	1	-
626767	60 - 340	50 - 250	679	1/2"	1550	1S	1	-

Packaging data

Barcode	Retail tool packaging			Transport package					
	Retail packing in mm (length)	Retail packing in mm (width)	Retail packing in mm (height)	Weight	Volume	Transport packing in mm (length)	Transport packing in mm (width)	Transport packing in mm (height)	Weight
626765	-	-	-	-	-	-	-	-	-
626766	-	-	-	-	-	-	-	-	-
626767	-	-	-	-	-	-	-	-	-