


NO	DESCRIPTION	DATE
①	REDUCE SPRING WASHER FROM 2 PCS TO 1 PC	06.06.97'
②	BACKGROUND FORMAT UPDATED	12.10.03'
③	BACKGROUND FORMAT UPDATED	02.01.12'
④	DEL. PROOF VOLTAGE WORKING VOLTAGE VOLTAGE RATING SOLDER → CLAMP	05.18.15'

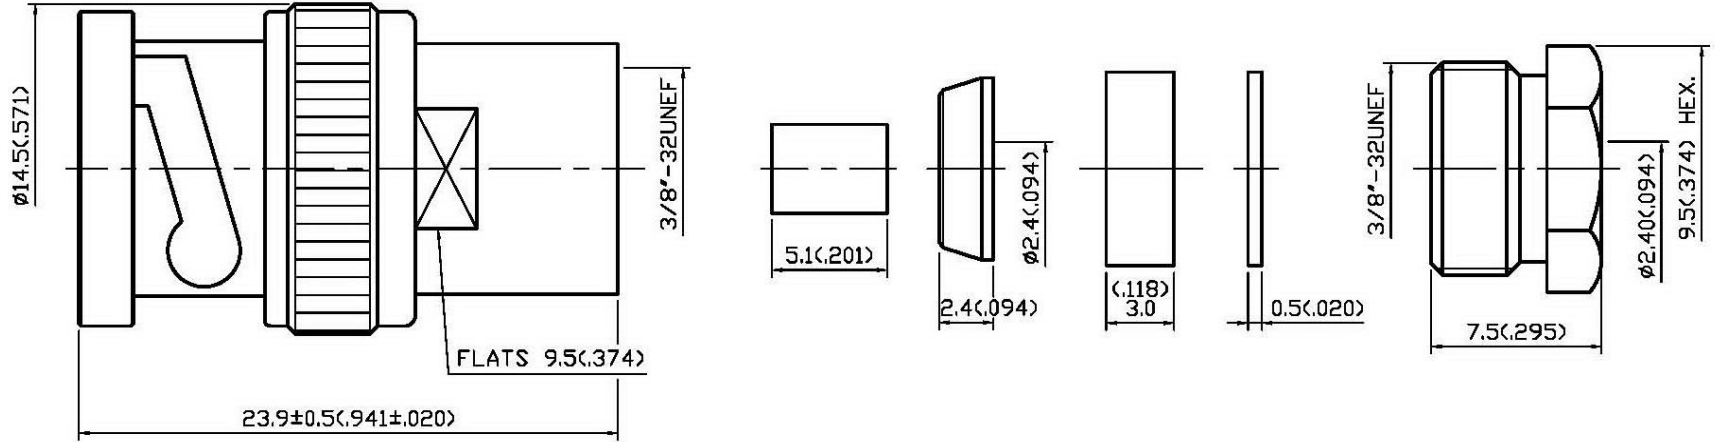

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX. ④

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3604
- 2.2 CENTER CONTACT: BRASS PER JIS-C3604
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710

3.0 FINISHES AND OTHERS

- 3.1 SEE BELOW TABLE FOR DETAILS.


4.0 MECHANICAL

- 4.1 FOR USE WITH RG178U OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CLAMP, INNER: SOLDER ④

5.0 ENVIRONMENTAL

- 5.1 OPERATING TEMPERATURE RANGE: -40° C TO +60° C

13	CENTER CONTACT	BRASS	1	GOLD
12	NUT	BRASS	1	NICKEL 100 μ " MIN.
11	WASHER	BRASS	1	NICKEL
10	GASKET	RUBBER	1	RED
9	BRAID CLAMP	BRASS	1	NICKEL 100 μ " MIN.
8	WASHER	BRASS	1	NICKEL
7	SPRING WASHER	SK-5	1	NICKEL
6	INSULATION	POM	1	NONE
5	WASHER	BRASS	1	NICKEL
4	GASKET	RUBBER	1	RED
3	INSULATION	TEFLON	1	NONE
2	BODY	BRASS	1	NICKEL 100 μ " MIN.
1	SHELL	ZINC	1	NICKEL
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

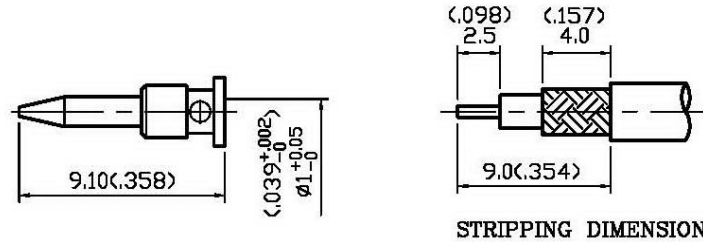

APPROVED

by _____ DATE: _____



DESCRIPTION		BNC STRAIGHT PLUG CLAMP	
製圖	DRAWN <i>Kristina</i>	TOLERANCE .X ±0.2	品名 13-01-3 T.G.Z 178U
檢圖	CHECK <i>Arc</i>	.XX ±0.1	日期 02.15.96'
認定	APPROVAL <i>Angela</i>	.XXX ±0.05	版次 A-4
	ANGLE ±5°	單位 mm(in)	REV. A-4
	比例 4:1	DWG.NO. 13-0342	