



Dial Caliper Gauges

Kroepelin • Quicktest Gauge “Interrest” • IP65

- for measuring of internal grooves, bore etc.
- water and colant proof acc. to DIN 40050 / IEC 60529
- tungsten carbide measuring contact points
- with rack gear
- with moveable contact arm
- with tolerance fingers
- incl. operation manual




D = form of measuring contact points

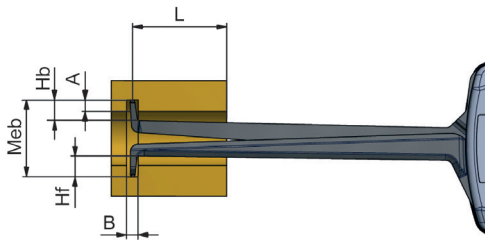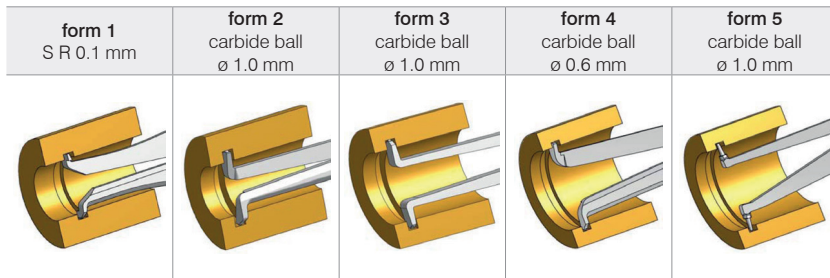

ART N°	mm	mm	form	L mm	A mm	B mm	Hb mm	Hf mm	F min. N	F max. N	max. mm	CC
240530	2.5 – 12.5	0.005	1	35	0.7	0.4	0.9	0.9	0.8	1.2	0.015	inclusive
240532	5.0 – 15.0	0.005	4	35	2.3	0.8	2.5	2.5	0.8	1.2	0.015	inclusive

Kroepelin • Quicktest Gauge “Interrest” • IP65

- for measuring of internal grooves, bores, etc.
- water and colant proof acc. to DIN 40050 / IEC 60529
- tungsten carbide measuring contact points
- with steel filament drive
- with moveable contact arm
- with tolerance fingers
- incl. operation manual

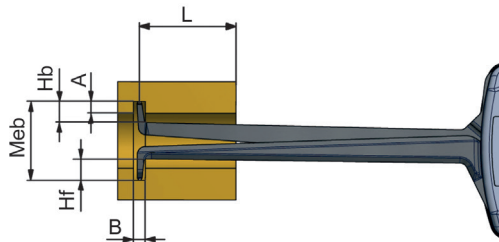

ART N°	mm	mm	form	L mm	A mm	B mm	Hb mm	Hf mm	F min. N	F max. N	max. mm	CC
240539	10 – 30	0.01	2	85	5.2	1.2	5.4	5.4	1.1	1.6	0.03	inclusive
240540	20 – 40	0.01	3	85	7.0	1.2	7.3	7.3	1.1	1.6	0.03	inclusive
240541	30 – 50	0.01	3	85	7.0	1.2	7.3	7.3	1.1	1.6	0.03	inclusive
240542	40 – 60	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240543	50 – 70	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240544	60 – 80	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240545	70 – 90	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive
240546	80 – 100	0.01	5	85	8.3	1.2	12.2	12.2	1.1	1.6	0.03	inclusive