


# FIRE RATED LED DOWNLIGHT



## DLS SERIES

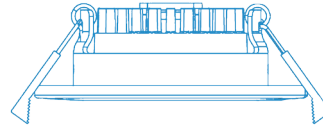

### Key Features

- Fire-rated for 30, 60 and 90 minutes (BS 476-21:1987)
- Low profile suitable for shallow ceiling voids
- Triac dimming compatible
- 25° swingable to adjust light tilt angle
- 3 Selectable CCT: 3000K / 4000K / 6000K
- Default bezel in white. Optional bezel colours in chrome, nickel or black
- Energy savings of up to 55% compared to compact fluorescent system
- Vibration-resistant
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- CE Marking, EMC safety compliance

### Application

Cabins, Galleys, Meeting rooms, Bathrooms

### Material

Steel body with powder coating, aluminium heatsink, PMMA diffuser and polycarbonate bezel


### Protection Class

IP65

### Weight

0.3Kg


### Optional Coloured Bezels

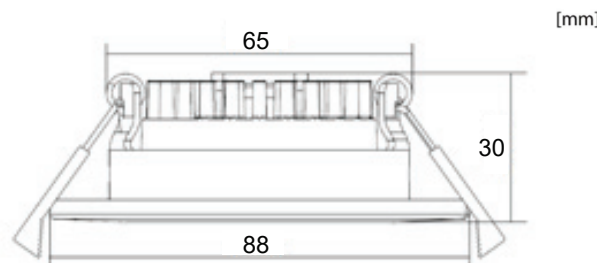

[mm]

## TECHNICAL SPECIFICATIONS



Ideal Replacement:  18W CFL

BH Code	Type	Voltage	Power	Bezel Colour	CCT	Beam Angle	Ambient Temp (Ta)	System Lumen
LADLSS88A2	DLSS88A2	220V - 240V AC	8W	White	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm
IGLADLSS88CA2	DLSS88A2	220V - 240V AC	8W	Chrome	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm
IGLADLSS88NA2	DLSS88A2	220V - 240V AC	8W	Nickel	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm
IGLADLSS88BA2	DLSS88A2	220V - 240V AC	8W	Black	3000K/4000K/6000K Selectable	60°	-20°C ~ +40°C	900lm



Due to our continuous development and product improvement policy, we reserve the rights to revise the specifications of all products without prior notice.