


Slogging open end wrench - 118/7

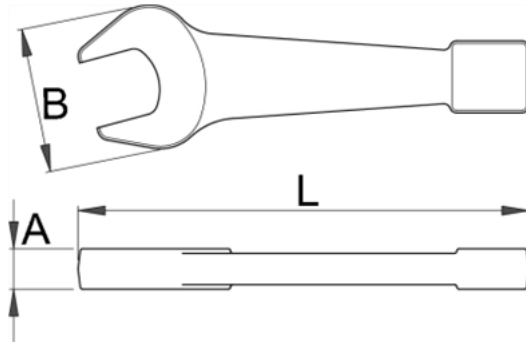

Description

- material: special tool steel
- drop forged, entirely hardened and tempered
- surface finish: anticorrosive oiled
- made according to standard DIN 133

Technical Data

Barcode	UNIOR	L	B	A	Weight	Box	Carton	
620466	24	170	56	15	489	1F	1	-
620467	27	170	56	15	477	1F	1	-
620468	30	200	70	18	863	1F	1	-
620469	32	200	70	18	863	1F	1	-
620470	36	200	70	18	834	1F	1	-
620471	41	240	88	20	1490	1F	1	-
620472	46	240	88	20	1450	1F	1	-
620473	50	265	102	20	1790	1F	1	-
620474	55	305	112	24	2700	1F	1	-
620475	60	305	112	24	2615	1F	1	-
620476	65	335	123	27	3645	1F	1	-
620477	70	370	143	30	2200	1F	1	-
620478	75	370	143	30	4865	1F	1	-
620479	80	400	175	33	6450	1F	1	-
620480	85	400	175	33	5775	1F	1	-
620481	90	450	192	38	7620	1F	1	-
620482	95	450	192	38	9400	1F	1	-
620483	100	485	230	45	10800	1F	1	-
620484	105	485	230	45	10400	1F	1	-
620485	110	515	235	48	12400	1F	1	-
620486	115	515	235	52	15800	1F	1	-
620487	120	535	260	53	20000	1F	1	-
620488	125	535	260	53	19200	1F	1	-
620489	130	565	285	53	23200	1F	1	-
620490	135	565	285	53	23400	1F	1	-
620491	140	635	307	58	28800	1F	1	-
620492	145	635	307	58	28800	1F	1	-
620493	150	635	307	58	28200	1F	1	-

Packaging data

Barcode	UNIOR	Retail tool packaging					Transport package			
		A	B	C	Weight	Box	A1	B1	C1	Weight
620466	24	82	220	32	559	1	77	225	25	559
620467	27	82	220	32	547	1	77	225	25	547
620468	30	82	220	32	933	1	77	225	25	933
620469	32	82	220	32	933	1	100	215	80	933
620470	36	82	220	32	904	1	100	215	80	904
620471	41	100	255	25	1560	1	251	100	28	1560
620472	46	100	255	30	1520	1	-	-	-	-
620473	50	115	275	30	1860	1	-	-	-	-
620474	55	125	315	35	2770	1	-	-	-	-
620475	60	125	320	35	2685	1	-	-	-	-
620476	65	140	345	35	3715	1	-	-	-	-
620477	70	153	380	38	2270	1	-	-	-	-

Barcode	mm	Retail tool packaging					Transport package			
		A	B	C	Person	Hand	A1	B1	C1	Person
62047 8	75	155	390	40	4935	1	-	-	-	-
62047 9	80	190	425	45	6520	1	-	-	-	-
62048 0	85	190	425	45	5845	1	-	-	-	-
62048 1	90	210	475	50	7690	1	-	-	-	-
62048 2	95	205	475	50	9470	1	-	-	-	-
62048 3	100	250	520	50	10870	1	-	-	-	-
62048 4	105	250	520	50	10470	1	-	-	-	-
62048 5	110	265	550	58	12470	1	-	-	-	-
62048 6	115	265	555	60	15870	1	-	-	-	-
62048 7	120	285	590	60	20070	1	-	-	-	-
62048 8	125	285	585	60	19270	1	-	-	-	-
62048 9	130	320	620	60	23270	1	-	-	-	-
62049 0	135	320	620	65	23470	1	-	-	-	-
62049 1	140	335	705	60	28870	1	-	-	-	-
62049 2	145	335	705	70	28870	1	-	-	-	-
62049 3	150	340	705	70	28270	1	-	-	-	-