




ENGLISH

## Datasheet

# RS PRO SLIM DUAL MOUNTING METAL FRAME USB3.0 A-A FT CONNECTOR

Stock No: 2354748, 2354749

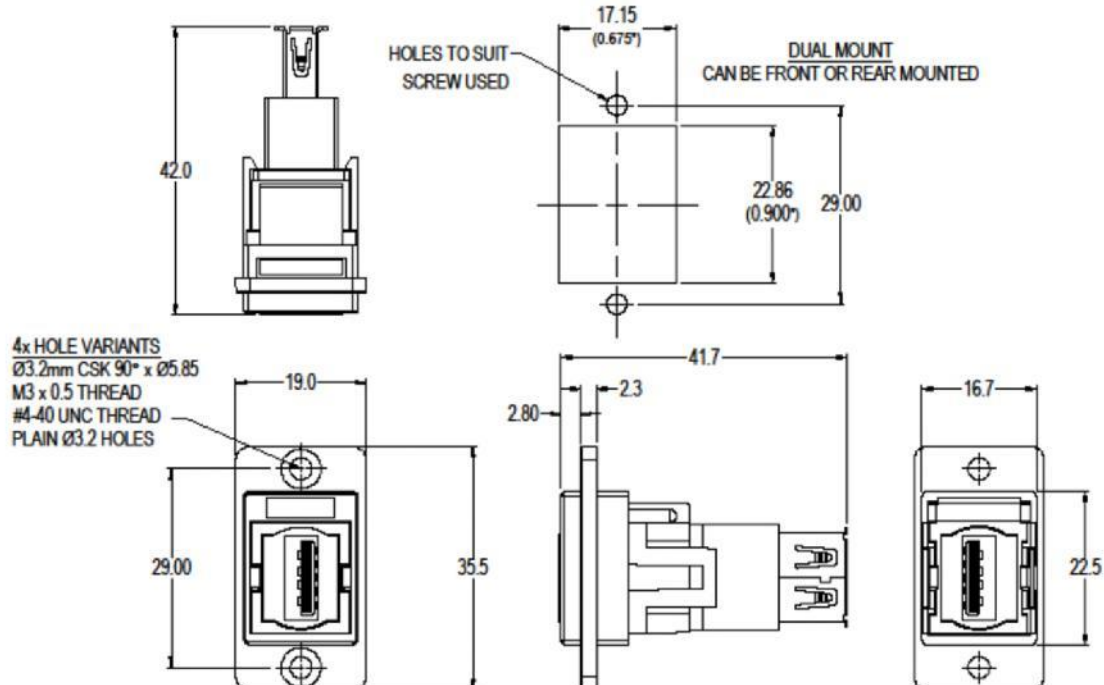

### Material:

1. Insert: ABS UL94 HB
2. Frame: Diecast, Metal or black plated
3. Inner Overmoldings: PE + PVC
4. Shell: Nickel plated steel
5. Contacts: Gold Plated

### Notes:

1. Voltage rating: 30V AC
2. Current rating: 1.8 A max
3. Contact resistance: 50mΩ max
4. Insulation resistance: 20MΩ min
5. Dielectric withstanding voltage: 500V AC
6. Operating Temperature: -20°C to 50°C

[rspro.com](http://rspro.com)

### Features & Benefits:

- Fits standard rectangular cutout.
- Front or rear mounting through the panel.
- Various hole mounting options
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile

### General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

### Variants:

**2354748** - USB3.0 A-A Metal frame, CSK holes

**2354749** - USB3.0 A-A Black metal frame, CSK holes

### Applications

- Space and aviation
- Education
- Industrial
- Broadcast and A/V
- Transportation
- Medical
- Vending and gaming



[rspro.com](http://rspro.com)

