



SON-T

SON-T 400W E E40 SL/12

High Pressure Sodium lamp with clear tubular outer bulb

Warnings and Safety

- Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	E40 [E40]
Burning Position	UNIVERSAL [Any/Universal]
Life to 5% failures (nom.)	12000 h
Life to 20% failures (nom.)	20000 h
Life to 50% failures (nom.)	28000 h
System description	External Ignitor (E)
Light Technical	
Colour Code	220 [CCT of 2,000 K]
Lamp Luminous Flux (Min)	43200 lm
Lamp Luminous Flux (Nom)	48000 lm
Lumen maintenance 2,000 hours (min.)	94 %
Lumen maintenance 2,000 hours (nom.)	97 %
Lumen maintenance 5,000 hours (min.)	88 %
Lumen maintenance 5,000 hours (nom.)	94 %
Colour Temperature, horizontal (Nom)	2000 K
Lamp Luminous Efficacy EM (Nom)	123 lm/W
Colour Rendering Index,horiz (Max)	25

Colour Rendering Index,horiz (Nom)	-
Operating and Electrical	
Power (Rated) (Nom)	392.0 W
Lamp current (EM) (nom.)	4.6 A
Ignition supply voltage (max.)	198 V
Ignition peak voltage (max.)	2800 V
Re-ignition time (min.) (max.)	120 s
Ignition time (max.)	5 s
Voltage (Max)	115 V
Voltage (Min)	85 V
Voltage (Nom)	100 V
Controls and Dimming	
Dimmable	Yes
Run-up time 90% (max.)	5 min
Mechanical and Housing	
Lamp Finish	Clear
Cap-base information	na [-]

SON-T

Bulb shape	T46 [T 46mm]	
Approval and Application		
Energy efficiency label (EEL)	A+	
Mercury (Hg) content (nom.)	24.5 mg	
Energy consumption kWh/1,000 hours	431 kWh	
Luminaire Design Requirements		
Bulb temperature (max.)	450 °C	
Cap-base temperature (max.)	250 °C	

Product Data	
Full product code	871829121292800
Order product name	SON-T 400W E E40 SL/12
EAN/UPC – product	8718291212928
Order code	928487300098
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12
SAP material	928487300098
SAP net weight (piece)	0.181 kg

D (max)

47 mm

0

82 mm


L

175 mm

C (max)

286 mm

Dimensional drawing

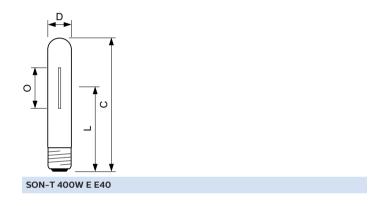

Photometric data


210°

330°


240


270°

300°

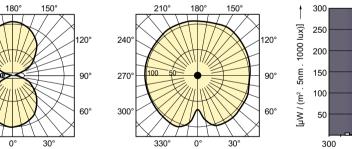

LDLD_SON-T-Light distribution diagram






Product

SON-T 400W E E40 SL/12

SON-T

Lifetime

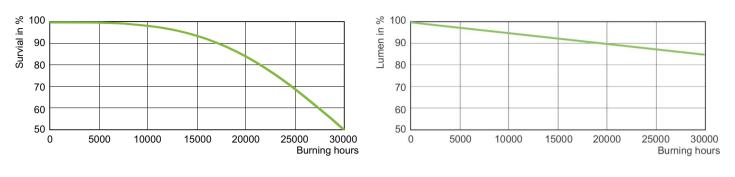

LDLE_SON-T_0001-Life expectancy diagram

LDLM_SON-T_0001-Lumen maintenance diagram



© 2021 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2021, March 18 - data subject to change