

För icke direkt toleranssatta mått gäller toleransklass
General tolerances if not otherwise stated




NOM DIM MM		TOL CLASS		
From	To	A	B	C
(1)	6	±0.05	±0.1	±0.2
(6)	30	±0.1	±0.2	±0.5
(30)	100	±0.15	±0.3	±0.8
(100)	300	±0.2	±0.5	±1.2
(300)	1000	±0.3	±0.8	±2

Hål / Holes H13


Skarpa kanter brutna där ej annat anges.
No sharp edges unless otherwise specified.

Övriga generella toleranser enligt ritning 4100-4644.
Additional general tolerances in accordance with drawing 4100-4644.

Denna ritning är Pressmaster AB:s egendom. Skyddad av gällande lag.
This drawing is the property of Pressmaster AB. Protected in accordance with prevailing law.

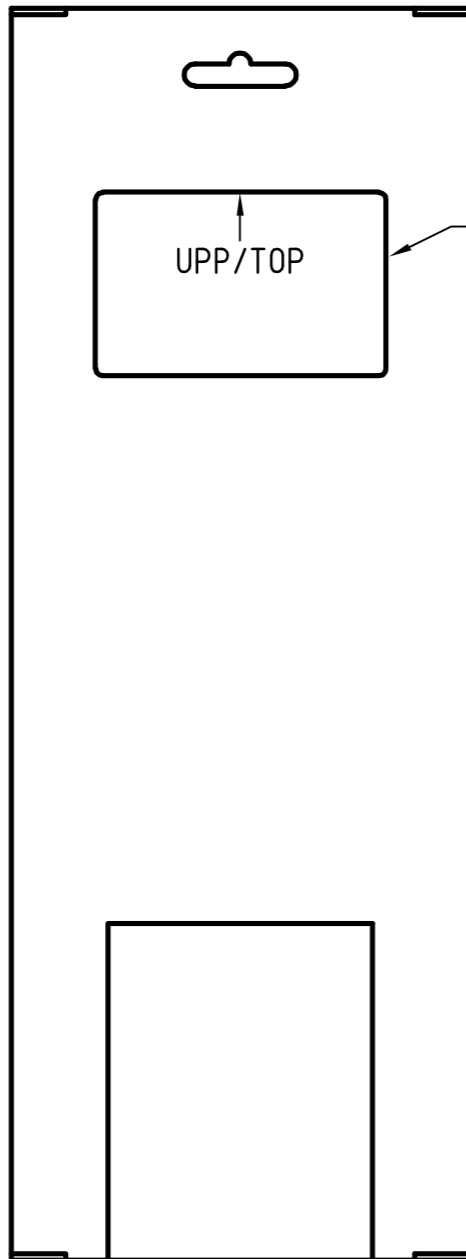

4100-9574

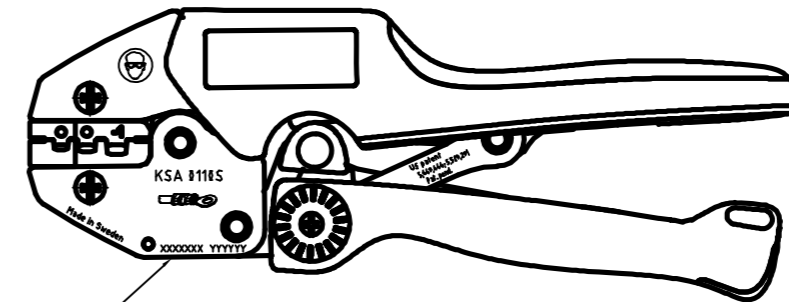

4300-3688

Rev	Change order	Change: A = Added W = Was D = Deleted	Date	Sign
8	P2751	Ändrad enligt kunden/ Changed according the customer	091103	SE

FÖRSPÄNNING / PRELOAD: 140 ± 30 N

Tolkmått / Gauge dimensions (mm)		
URTAG NEST	Gåtolk GO	Stopptolk NO GO
TRANSP.GRÖN/GREEN	Ø1.30	Ø1.50
MELL.GRÖN/MED. GREEN	Ø1.75	Ø1.95
RÖD/RED	Ø2.40	Ø2.60

Material		Behandling/Treatment			Status	
Konstr./Design CF	Ritad/Drawn TGW	Datum/Date 2009-11-03	Skala/Scale 1:2	Kontr./Checked IP	Godk./Approved NE	Änne/Blank Frisläppt
pressmaster ®				Benämning/Denomination Krimptång 241-4344		Vikt/Weight,gram Art grp 012
ISO 9001 REG NR FM13647				Krimptång 241-4344 CRIMPING TOOL KSA 0110S		Ritn nr/Drawing no 43002231 REV 008