

LED EMERGENCY EXIT LUMINAIRE



HL99



Mounting Method


Recess mount

Material

Housing: E.G steel with white powder coating
Mounting plate: Stainless steel

Key Features

- Low voltage cut-off to prevent over discharge
- Constant current when charging
- Green LED to indicate batteries charging
- Push test switch to simulate power failure
- SS 563 : Part 2 : 2010 compliance

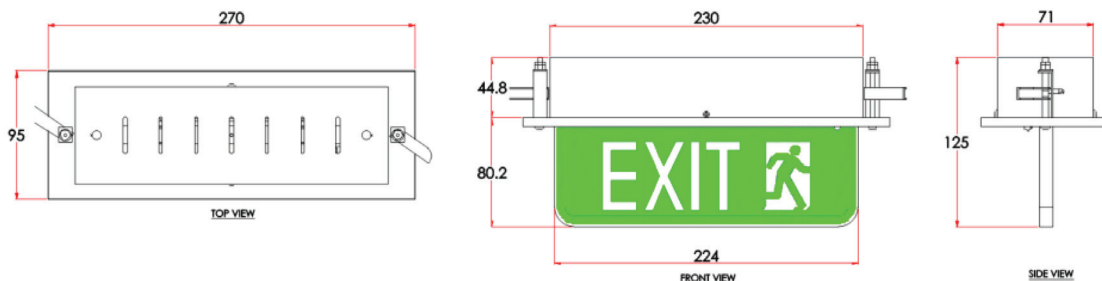

TECHNICAL SPECIFICATIONS

Classification	: Class I
System Mode	: Maintained
Input Voltage	: 110 ~ 240Vac 50/60Hz
Power Consumption	: 3W
Light Source	: 12pcs SMD LED (White)
Batteries	: 2.4V 1.6Ah NiCd / NiMh
Emergency Duration	: 3 hours +/-10%
Rechargeable Period	: 16-24 hours
Dimension Casing	: 270L X 95W X 125H (mm)
Weight	: ~1.5 Kg
IP Rating	: IP 20