

1.0 ELECTRICAL

- 1.1 FREQUENCY RANGE: DC-4 GHz
- 1.2 NOMINAL IMPEDANCE: 50 OHMS
- 1.3 VOLTAGE RATING: 500 VOLTS MAX.

2.0 MATERIALS

- 2.1 BODIES: BRASS PER JIS-C3804
- 2.2 CENTER CONTACT: BRASS PER JIS-C3804
- 2.3 INSULATION: TEFLON PER ASTM D1457 AND ASTM D1710
- 2.4 CRIMP FERRULE: BRASS PER JIS-C2700

3.0 FINISHES AND OTHERS

3.1 SEE BELOW TABLE FOR DETAILS.


4.0 MECHANICAL

- 4.1 FOR USE WITH RG59U OR SIMILAR STYLE CABLE
- 4.2 CABLE ATTACHMENT: OUTER: CRIMP, INNER: SOLDER
- 4.3 CRIMP SIZE REQUIRED: FERRULE: 6.5(.256) HEX. CRIMP TOOL

5.0 ENVIRONMENTAL

5.1 OPERATING TEMPERATURE RANGE: -20° C TO +80° C

12	CRIMP FERRULE	BRASS	1	NICKEL
11	CHASSIS	BRASS	1	NICKEL 100μ" MIN.
10	NUT	BRASS	1	NICKEL 100μ" MIN.
9	BODY II	BRASS	1	NICKEL 100μ" MIN.
8	CENTER CONTACT	BRASS	1	GOLD
7	BODY I	BRASS	1	NICKEL 100μ" MIN.
6	WASHER II	BRASS	1	NICKEL
5	SPRING WASHER	SK-5	1	NICKEL
4	WASHER I	BRASS	1	NICKEL
3	GASKET	RUBBER	1	RED
2	INSULATION	TEFLON	1	NONE
1	SHELL	ZINC	1	NICKEL
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH

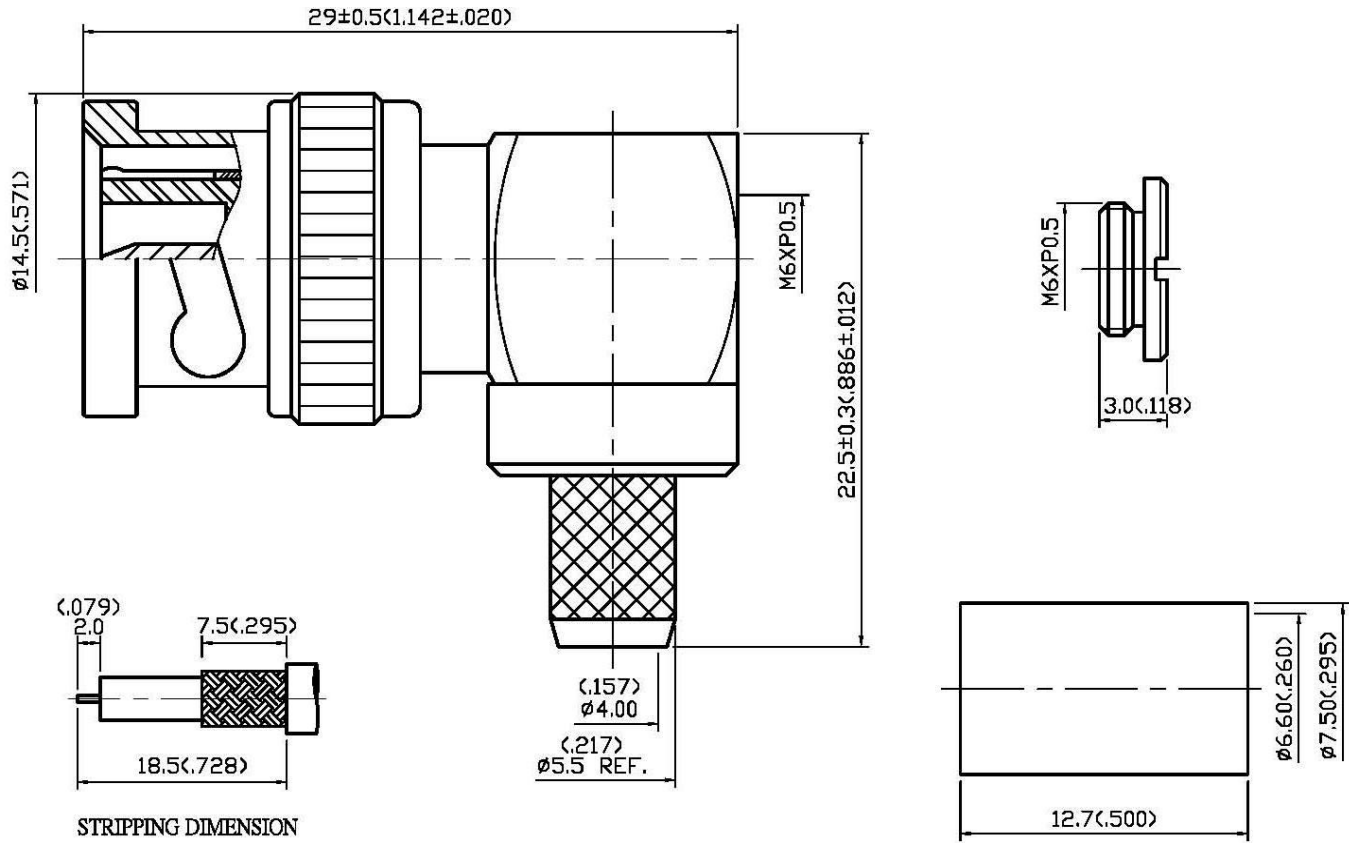

STRIPPING DIMENSION
SCALE 2:1

APPROVED by _____ DATE: _____



DESCRIPTION		BNC RIGHT ANGLE PLUG CRIMP							
製圖	DRAWN	TOLERANCE	品名	13-14-4	T.G.Z	59U	DATE	版	REV.
	Yoko			NR0HS COMPLIANT	(50U)	06.18.14	次	A-0	
檢圖	CHECK	.XX ±0.1	UNIT	DWG.NO.	13-0126				
	Arc								
認定	APPROVAL	.XXX ±0.05	SCALE						
	Jenny								