


- Customization
- 01 series
- 03S series
- 05S series**
- 07S series
- 08 series
- 09C series
- 10 series
- 11 series
- 12 series
- 13 series
- 17 series
- 20 series
- 21 series
- 23 series
- 24 series
- 27series
- 28 series
- 30 series
- 35 series
- 43 series
- F02 series
- L01 series

05S 80-350



PA

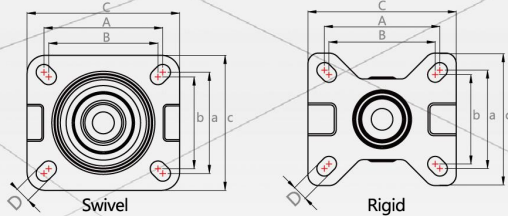

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

Wheel: Nylon (PA) all-in-one-shaped, wearproof and impact resistance.
Wheel surface hardness: 70-75°Shore D.
Bearing: SUPO customization double ball bearing with iron dust-proof cover.
 For more information please refer to page295.

* Remark: Please refer to the standard of Zhongshan caster industry association.

Swivel Top Plate		NO.										
	Wheel Material	Model	Wheel Dia (mm)	Tread Width (mm)	Load Capacity (kg)	Load Height (mm)	Swivel Radius (mm)	Brake Swivel Radius (mm)	Bearing	Plate size (mm)	Hole Spacing (mm)	Hole size (mm)
	(PA)	C05S-01-75-662	75(3")	38	180	112	75	108		(C)101x82	(A)80x60 (B)73x53	(D)11
		C05S-01D-75-662								(C)101x85		
	(PA)	C05S-04-75-662	100(4")	40	210	137	88	114		(C)101x82	(A)88x75 (B)81x68	(D)11
		C05S-01-100-662								(C)101x85		
	(PA)	C05S-04-100-662	125(5")	40	300	164	106	127		(C)113x100	(A)88x75 (B)81x68	(D)11
		C05S-01-125-662								(C)113x101		
	(PA)	C05S-04-125-662	150(6")	40	330	191	118	130		(C)113x100	(A)88x75 (B)81x68	(D)11
		C05S-01-150-662								(C)113x101		
		C05S-01D-150-662								(C)113x100		
		C05S-04-150-662								(C)113x101		

Others (MOQ)



Side lock brake(metal)	Swivel(Hollow Rivet)	Swivel(Hollow Rivet) with Total lock brake(Plastic)	Swivel(Hollow Rivet) with side lock brake(Metal)
C05S-01C-75-662	C05S-03-75-662	C05S-03D-75-662	C05S-03C-75-662
C05S-01C-100-662	C05S-03-100-662	C05S-03D-100-662	C05S-03C-100-662
C05S-01C-125-662	C05S-03-125-662	C05S-03D-125-662	C05S-03C-125-662
C05S-01C-150-662	C05S-03-150-662	C05S-03D-150-662	C05S-03C-150-662