




ENGLISH

Datasheet

Stock No: 229-3989

RS Pro Black Cable Retainer, 40 x 25mm

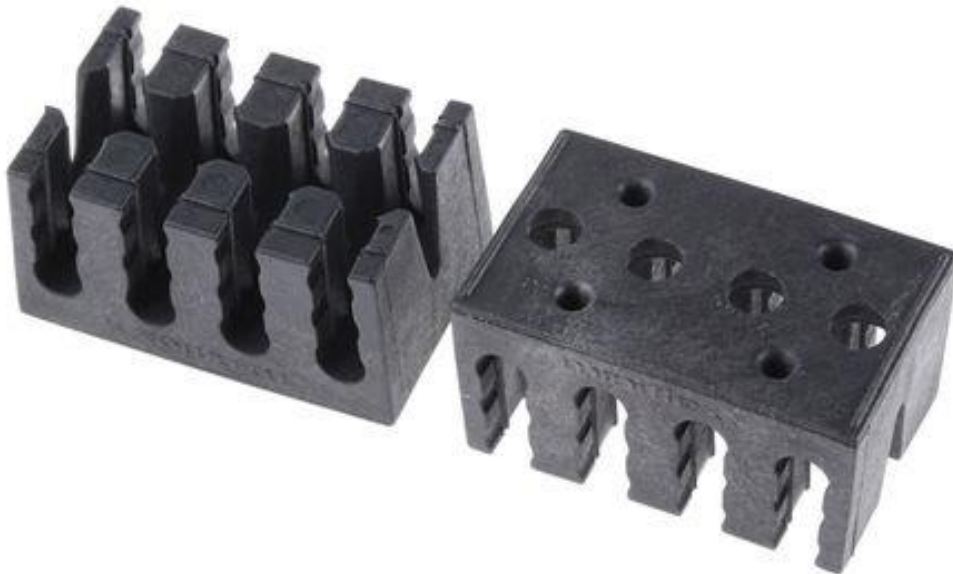

Product Details

Miniflex® Slotted Multi-Bracket

The Miniflex Slotted Multi-Bracket is for use at distribution points where orderly fibre management and protection is required. It can be adapted to individual needs with the use of Miniflex Fibre Bend Limiting Tube (FBLT). From the initial fibre entry point superior fibre protection against bending, crushing and kicking is secured. Assembly of tubes is made easy by a simple lay-through design, no threading is required. With a maximum of 12 fibre Bend Limiting Tubes the bracket can support up to 70N pull on any patch cord and completes the integrity of the system.

Material: Nylon 6.6 flame retardant



ENGLISH

Specifications:

Dimensions	40 x 25mm
Material	Nylon 66
Colour	Black
Width	25 mm
Length	40mm
CAD Drawing	3D CAD Model