




Datasheet

RS 1A Radial F Leaded PCB Mount Fuse, 250 V ac RS Stock 611-0658

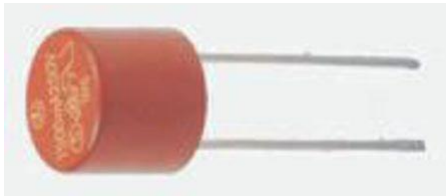


SRF RoHS I-T CHARACTERISTICS CURVE

Dimensions: (mm)

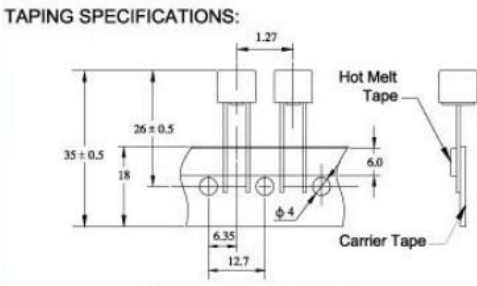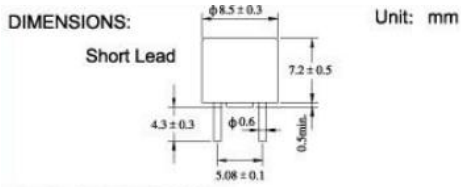

MATERIALS: THERMOPLASTIC, UL94-V0

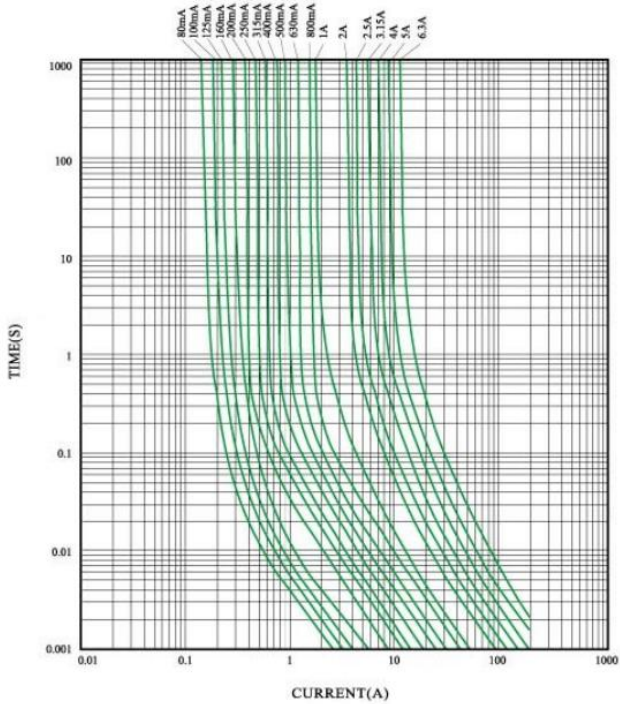

Specifications:

BREAKING CAPACITY:
CCC/SEMKO/VDE: 35A OR 10In WHICHEVER IS GREATER
UR/CSA/PSE: 100A 250V AC

ELECTRICAL CHARACTERISTICS:

| RATING | | BLOWING TIME |
|--------|-----|--------------|
| 2.1In | Max | 30min |
| 2.75In | Min | 10ms |
| | Max | 3sec |
| 4In | Min | 3ms |
| | Max | 300ms |
| 10In | Max | 20ms |