



ENGLISH

Datasheet


Stock No. 122-5886~122-5890

RS PRO ISO6722-1 Automotive Thick Wall wire

3.0mm², 30M



Cross Section

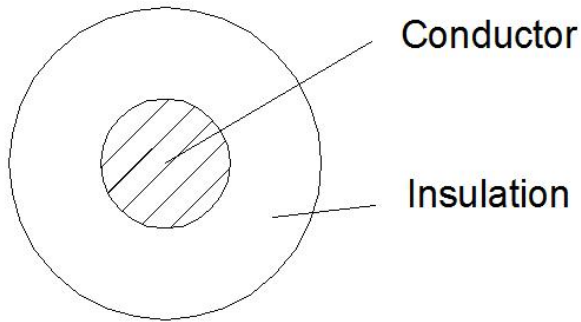

Technical Specification

Marking	Performance	
RS 3.0mm ² VEHICLE CABLE 600V CLASS B ISO6722-1	Characteristics:	
Description	Test Item	Standard Value
Application cable intended for use in road vehicle applications where the nominal system voltage is greater than (60Vdc or 25Vac) and less than or equal to (600 V d.c. or 600 V a.c.)	Test Material	PVC
Reference Standard: ISO 6722-1	Flammability Test	VW-1
Rated Temperature: -40°C~100°C	Max.DC Resistance(20°C Ω/km)	6.15
Rated Voltage: 600V	Product Name: Automotive wire3.0mm ² Cable	
Construction	RS Code	Reel length(M)
Conductor Stranded Bare Copper	Description	
Cores Number 1C	1225886	30
Area(mm ²) 3.0	1225887	30
Construction(±0.008mm) 175/0.15	1225888	30
Stranded Dia.(mm) 2.4	1225889	30
Insulation Material PVC	1225890	30
Insulation Color per customer needs		
Ave Thickness(mm) 0.70		
Min Thickness(mm) 0.56		
Insulation Dia.(±0.20mm) 4.1		
Remark: RoHS and REACH Compliance		
Package: 30M/reel		