



DuPont™ Tyvek® 400 D

Original name: Tyvek® Dual

Coverall

☐ TD125SWBXX0025CM

Serged seams
Collar
Zipper closure
Storm flap
Elastic waist
Elastic wrists
Elastic ankles
Thumb loops
MD-4X



Front with hood



Back

TD127S

Tyvek® 400 D garments provide an ideal balance of comfort, durability and protection for workers

Comfort fit design helps enable a greater range of movement while stretching and bending

Designed for very specific applications where demanding comfort requirements are combined with limited protective requirements for frontal exposures

Well suited for workers who are involved in a variety of strenuous activities that can lead to heat stress in applications that include:

- Wind turbine manufacturing
- Composites manufacturing
- Boat manufacturing
- Remediation
- Utilities
- Maintenance
- Glass manufacturing

Coverall

☐ TD127SWBXX0025CM

Serged seams
Attached hood (respirator fit)²
Zipper closure
Storm flap
Elastic waist
Elastic wrists
Elastic ankles
Thumb loops
MD-4X



Tyvek® 400 fabric on the front and hood

Tyvek® fabric is composed of flashspun high-density polyethylene, which creates a unique nonwoven material available only from DuPont

Tyvek® 400 fabric provides an ideal balance of protection, durability and comfort compared to any limited-use fabric technology

Tyvek® 400 fabric's durability delivers a consistently better barrier, even after wear and abrasion

Tyvek® 400 is white

Pants

☐ TD350SWBXX0025CM

Serged seams
Elastic waist
MD-5X



ProShield® 10 fabric on the back

ProShield® 10 fabric has been optimized for comfort, softness and breathability

ProShield® 10 fabric is designed for non-hazardous dry particle and light liquid splash applications

ProShield® 10 is made from a polypropylene spunbond-meltblown-spunbond (SMS) fabric

ProShield® 10 is blue


²**Respirator fit hoods** are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 7 for photos.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

Warning: Tyvek® and ProShield® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® and ProShield® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as make to order. Stock/make to order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.





DuPont™ Tyvek® 400

Original name: Tyvek®

Coverall

- ☐ TY120SWHXX002500 MD-7X
- ☐ TY120SWHXX0006G1 MD-4X
- ☐ TY120SWHXX0025VP MD-7X
- ☐ TY120SWHXX0025NF MD-7X

★ NAFTA/TAA COMPLIANT

Serged seams
Collar
Zipper closure
Storm flap
Elastic waist
Comfort fit design



Coverall

- ☐ TY121SWHXX0025NS

Serged seams
Collar
Zipper closure
Storm flap
Elastic wrists
Elastic ankles
Attached skid-resistant boots MD-7X



Coverall

- ☐ TY125SWHXX002500 MD-7X
- ☐ TY125SWHXX0006G1 MD-4X
- ☐ TY125SWHXX0025VP MD-7X

Serged seams
Collar
Zipper closure
Storm flap
Elastic waist
Elastic wrists
Elastic ankles
Comfort fit design



Only NF option codes are NAFTA/TAA compliant.

Respirator fit hoods are designed with a longer zipper, extending to the chin for complete coverage of the neck area. **Standard hoods** only extend to the neck. See page 7 for photos.

Storm flaps: All standard bound and taped seam coveralls have a single storm flap with a pressure-sensitive tape closure. Serged seam coveralls do not have a storm flap.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Coverall

- ☐ TY122SWHXX002500 MD-7X
- ☐ TY122SWHXX0006G1 MD-4X
- ☐ TY122SWHXX0025NF MD-7X
- ☐ TY122SWHXX0025VP MD-7X

Serged seams
Attached hood (respirator fit)²
Zipper closure
Storm flap
Elastic waist
Elastic wrists
Elastic ankles
Attached skid-resistant boots
Comfort fit design



Coverall

- ☐ TY127SWHXX002500 MD-7X
- ☐ TY127SWHXX0006G1 MD-4X
- ☐ TY127SWHXX0025VP MD-7X
- ☐ TY127SWHXX0025NF MD-7X

★ NAFTA/TAA COMPLIANT

Serged seams
Attached hood (respirator fit)²
Zipper closure
Storm flap
Elastic waist
Elastic wrists
Elastic ankles
Comfort fit design



Coverall

- ☐ TY151SWHXX002500

Serged seams
Collar
Snap closure
XL-3X



An ideal balance of protection, durability and comfort

Comfort fit design allows for a greater range of motion and fewer blowouts

Breathable inherent barrier protection against hazardous dry particles, aerosols and non-hazardous light liquid splash

Excellent abrasion resistance; protects against hazardous particles down to one micron in size

When used with other PPE, can help reduce risk of cross-contamination in pandemic response activities

One garment for many applications:

- General maintenance/operations
- Microcrystalline silica
- Lead abatement
- Environmental cleanup
- Agriculture
- Asbestos abatement
- Food processing
- Mold remediation
- Spray painting
- Crime scene investigation
- Wind turbine manufacturing

Tyvek® 400 is white

G1 = Reduced case quantity

NS = Non-skid material


NF = NAFTA/TAA compliant

VP = Vend packed

Note: Not all sizes available in all styles.

Warning: Tyvek® and ProShield® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® and ProShield® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as make to order. Stock/make to order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

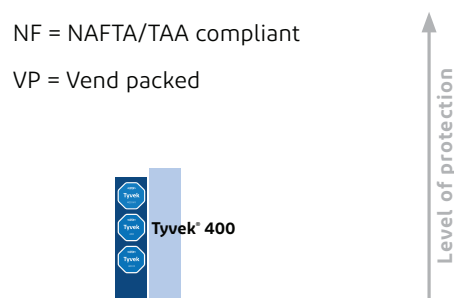



DuPont™ Tyvek® 400

Original name: Tyvek®

Frock

- ☐ TY210SWHXX003000 SM-7X
- ☐ TY210SWHXX0030VP D-4X

Serged seams
Collar
Snap closure



Shirt

- ☐ TY303SWHXX005000 SM-7X
- ☐ TY303SWHXX0012G1 MD-4X
- ☐ TY303SWHXX0050VP MD-3X

Serged seams
Collar
Snap closure
Long sleeve



Frock

- ☐ TY211SWHXX003000

Serged seams
Collar
Snap closure
Elastic wrists
Knee length
SM-7X



Pants

- ☐ TY350SWHXX005000 SM-7X
- ☐ TY350SWHXX0012G1 MD-4X
- ☐ TY350SWHXX0050VP MD-3X

Serged seams
Elastic waist



Frock

- ☐ TY216SWHXX003000

Serged seams
Mandarin collar
Snap closure
Elastic wrists
SM-5X



Apron

- ☐ TY273BWHXX010000
- ☐ TY273BWHXX0100VP

Bound seams
Bound neck & ties
Bib style
28" x 36"
One size fits most



Lab coat

- ☐ TY212SWHXX003000 SM-7X
- ☐ TY212SWHXX0008G1 MD-4X
- ☐ TY212SWHXX0030VP MD-4X
- ☐ TY212SWHXX0030NF SM-7X

★ NAFTA/TAA COMPLIANT

Serged seams
Collar
Snap closure
Two pockets




Sleeves

- ☐ TY500SWHXX020000
- ☐ TY500SWHXX0200NF

★ NAFTA/TAA COMPLIANT

Serged seams
Elastic openings
18" length
One size fits most



Hood

- ☐ TY657SWHXX010000

Serged seams
Pullover
Elastic face opening
Shoulder length
One size fits most



Only NF option codes are NAFTA/TAA compliant.

Bound and sewn seams and closures have less barrier than fabric.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Note: Not all sizes available in all styles.

Warning: Tyvek® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as make to order. Stock/make to order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.



Level of protection



DuPont™ Tyvek® 400

Original name: Tyvek® boot and shoe covers

Shoe cover

☐ TY450SWHXX020000

Tyvek® fabric
Serged seams
Elastic openings
5" height
200/cs (100 pairs)
One size fits most



Shoe cover

☐ TY450SWHXX0200LG

Tyvek® fabric
Serged seams
Elastic openings
8.25" height
200/cs (100 pairs)
One size fits most



Boot cover

☐ TY452SWHXX010000


Tyvek® fabric
Serged seams
Elastic openings
10" height
100/cs (50 pairs)
One size fits most



Boot cover

☐ TY454SWHXX010000


Tyvek® fabric
Serged seams
Elastic openings
18" height
100/cs (50 pairs)
One size fits most



Boot cover

☐ TY454SWHXX0100SR

Tyvek® fabric
Tyvek® 400 FC sole
Serged seams
Elastic openings
Elastic ankles
18" height
Skid resistant
100/cs (50 pairs)
LG-XL




Shoe cover—Tyvek® 400 FC

☐ FC450SGYXX020000

☐ FC450SGYXX0200NF

★ **NAFTA/TAA COMPLIANT**


Tyvek® FC fabric
Serged seams
Elastic openings
Elastic toe, sole
and heel seams
5" height
Skid resistant
200/cs (100 pairs)
One size fits most



Boot cover—Tyvek® 400 FC

☐ FC454SGYXX010000

Tyvek® FC fabric
Serged seams
Elastic openings
18" height
Skid resistant
100/cs (50 pairs)
One size fits most



Skid-resistant materials for shoe/boot covers to prevent slipping

Tyvek® 400 with Friction Coating

Tyvek® 400 FC is gray

LG = 8.25" high shoe cover

NF = NAFTA/TAA compliant

SR = Skid resistant

Only NF option codes are NAFTA/TAA compliant.

Serged and/or bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.

Tyvek® 400 with Friction Coating (FC) has been specially treated to promote ink/coating adhesion. This treatment lowers the typical bulk liquid holdout values for Tyvek® fabric. Products with this treatment offer limited bulk liquid holdout. If barrier protection from liquid splash is required, please consider a non-treated Tyvek® style or other substrate.

Warning: Tyvek® should not be used around heat, flames, sparks or in potentially flammable or explosive environments. Garments made of Tyvek® fabrics should have slip-resistant or anti-slip materials on the outer surface of boots, shoe covers, or other garment surfaces in conditions where slipping could occur.

Certain accessory items are also identified as make to order. Stock/make to order designations are based on sales volume and production efficiencies. Therefore, designations are subject to change without notice.

