

Datasheet

RS PRO EVA Foam Rubber Mounting Mat

Stock No: 2035168




Technical Specifications:

Lightweight, non-slip vibration isolation and noise suppression pad for applications where bolting needs to be avoided.

Length	Width	Thickness	Working Load Range	
			KG	lbs
50	50	22	8 - 80	3.6 - 36
75	75	22	18 - 180	8 - 80
100	100	22	32 - 320	14 - 145
150	150	22	72 - 720	33 - 330
305	305	22	288 - 2,880	131 - 1,310
457	457	22	648 - 6,480	294 - 2,945

Features & Benefits:

- **Anti-skid design through opposed ribbed pads on top and bottom surfaces**
- **Reduces noise and vibration**
- **No bolting required**
- **Simple installation**
- **Easily cut to specific sizes**

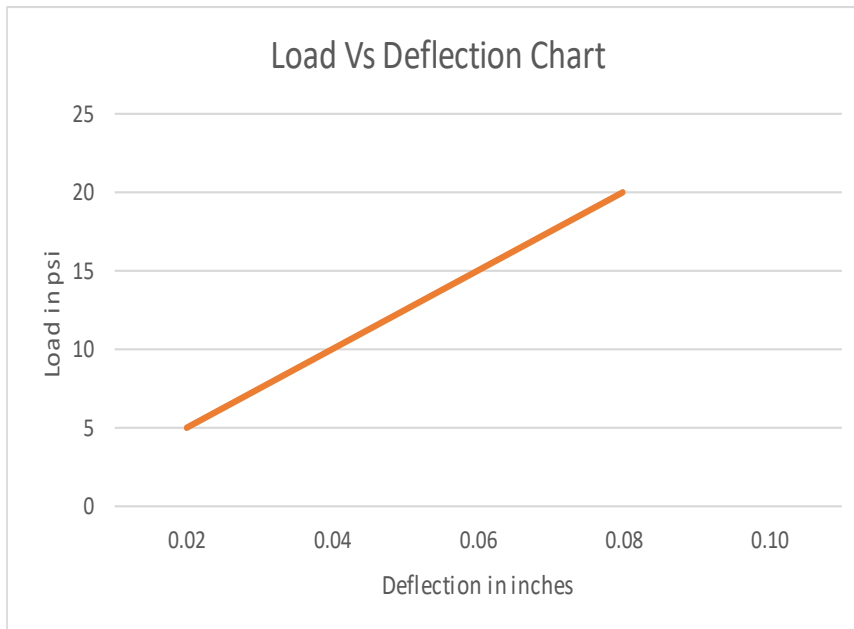

General

These Foam Rubber Mounting Pads are one of a portfolio of solutions for noise and vibration reduction in applications where bolting needs to be avoided.

The EVA Foam Rubber Pad is designed to eliminate structure born vibration and noise, and has opposing ribbed pads on both sides for isolation and positive grip.

With a working range of 4 to 20 psi, the maximum load per standard sheet is 648 (295) – 6,480 (2,945) lbs (kg) .

Recommended for HVAC, motors, pumps, chillers, air conditioning units, generators etc.

Re-usable when machinery is moved or relocated. Lightweight for ease of handling and installation. Excellent acoustic isolation.

