




ENGLISH

## Datasheet

# RS PRO SLIM FRONT MOUNTING USB3.0 A-A FT CONNECTOR

Stock No: 2188300, 2188301

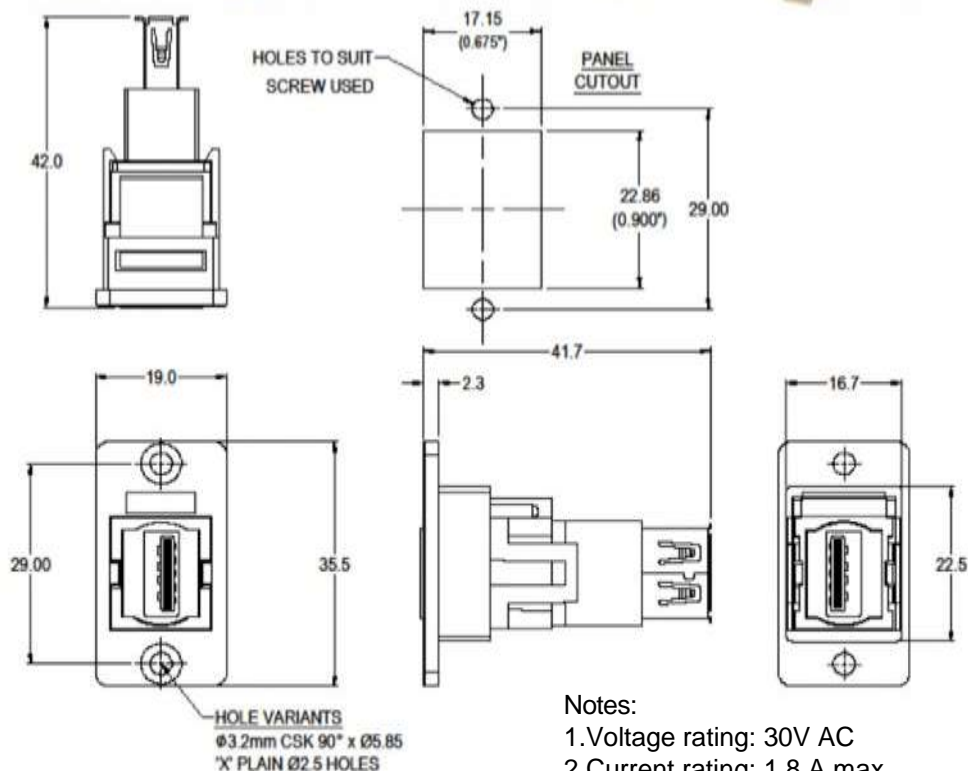

### Material:

1. Insert: ABS UL94 HB
2. Plastic Frame: Polyamide UL94 V-2
3. Inner Overmouldings: PE + PVC
4. Shell: Nickel plated steel
5. Contacts: Gold Plated

### Notes:

1. Voltage rating: 30V AC
2. Current rating: 1.8 A max
3. Contact resistance: 50m $\Omega$  max
4. Insulation resistance: 20M $\Omega$  min
5. Dielectric withstanding voltage: 500V AC
6. Operating Temperature: -20°C to 50°C

[rspro.com](http://rspro.com)

### **Features & Benefits:**

- Fits standard rectangular cutout.
- Various hole mounting options
- No soldering or punch termination. Use standard cable for each connector style.
- Low rear profile

### **General:**

**Please note: Functionality is affected by cable quality, length and cable wiring configuration.**

### **Variants:**

2188300- **USB3.0 A-A Black plastic frame, CSK holes**

2188301- **USB3.0 A-A Black plastic frame, Ø2.5 PLAIN holes**



[rspro.com](http://rspro.com)

