

**Datasheet**

# RS PRO Angular Contact

Stock No. 2058765



### Technical Specifications:


<b>Id (mm)</b>	<b>25</b>
<b>Od (mm)</b>	<b>62</b>
<b>Width (mm)</b>	<b>17</b>
<b>Material</b>	<b>Steel</b>

## Features & Benefits:

Angular contact ball bearings come with a 40° contact angle. The large contact angle accommodates moderate to large axial loads as well as light to moderate radial loads, will only allow an axial load in 1 direction, to accommodate axial loads in various directions the bearings can be paired.

Typical mounting combinations include DB (Back to back), DF (Face to face) and DT (Tandem).

### Dimensional line drawings

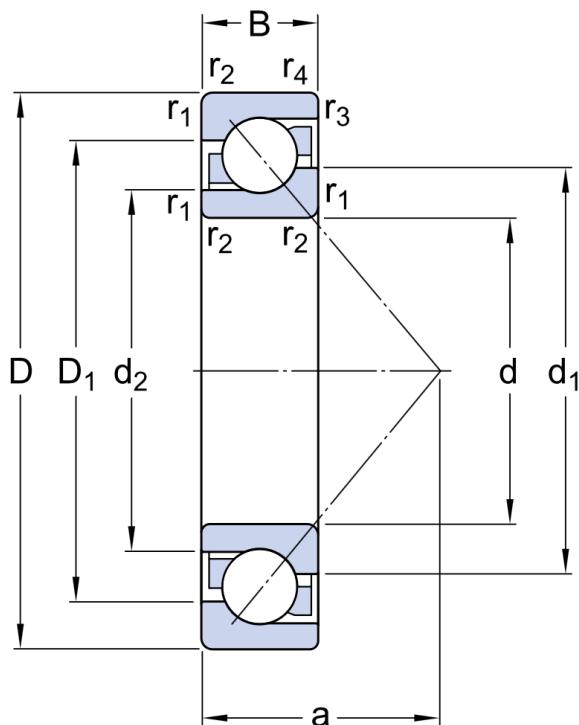

$d$	25 mm
$D$	62 mm
$B$	17 mm
$d_1$	≈ 39.75 mm
$d_2$	≈ 32.38 mm
$D_1$	≈ 48.25 mm
$a$	26.8 mm
$r_{1,2}$	min. 1.1 mm
$r_{3,4}$	min. 0.6 mm