


FEATURES

- Welded, exposed junction for fast response times
- Durable construction with PFA insulation for resistance
- Tolerance to ANSI MC96.1 Class 1 for optimum accuracy
- Miniature plug termination
- Ideal for test & development applications

RS PRO Type K Thermocouple 1m Length, 1/0.2mm Diameter → +250°C

RS Stock No.: 814-0137

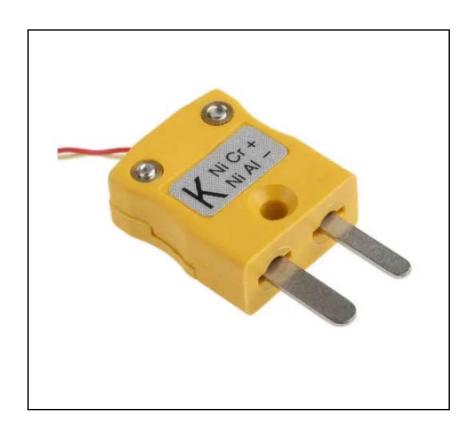

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



Product Description

From RS Pro a range of type T and K bare wire thermocouple temperature sensors with a tolerance to ANSI MC96.1 class 1 for optimum accuracy. These thermocouple temperature sensors have a durable construction a welded exposed junction for a fast response time. One end of the thermocouple is terminated with a miniature plug for a quick and easy connection. The twin twisted leads of these thermocouple sensors are insulated with durable Teflon PFA.

General Specifications

Thermocouple Type	Type K
Temperature Measurement Range	-75°C to 250°C
Construction	PFA insulation
Measuring Junction	Welded, exposed junction
Output	Energy Output 0-60 Joules
Application	General purpose, Ideal for test & development applications
Accuracy	Class 1 for optimum accuracy

Mechanical Specifications

Probe Diameter	1/0.2mm
Probe Length	1m
Insulation / Sheath Material	PFA insulation
Termination Type	Miniature Plug
Cable Insulation	PFA insulation
Weight	4Kg

Approvals

Compliance/Certifications	BS EN 60584-3:2008, ANSI MC96.1 class 1
Standards Met	BS EN 60584-3:2008, ANSI MC96.1 class 1





T/C Type	Conductors	Length	Termination	+Positive tail wire	-Negative tail wire code	Allied Code	RS order Code
'K' 'K' 'K' 'K'	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Green Green Green Green	White White White White	70643600	363-0250 110-4482 123-6306 123-6307
"" "" "" "" ""	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Black Black Black Black	White White White	70643599	363-0244 123-6308 123-6309 123-6310
'T' 'T' 'T' 'T'	1/0.2mm 1/0.2mm 1/0.2mm 1/0.2mm	1 metre 2 metre 5 metre 10 metre	Mini plug Mini plug Mini plug Mini plug	Brown Brown Brown Brown	White White White	70643601	363-0266 123-6311 123-6312 123-6313



T/C Type	Conductors	Cores	Reel Length	Allied code	RS order code
J	1/0.2mm	+Black/-White	25 metres	70657194	827-5980
J	1/0.2mm	+Black/-White	50 metres	70657195	827-5984
J	1/0.315mm	+Black/-White	25 metres	70657198	827-5993
J	1/0.315mm	+Black/-White	50 metres	70657199	827-5996
K	1/0.315mm	+Green/-White	25 metres	70657200	827-6000
K	1/0.315mm	+Green/-White	50 metres	70657205	827-6019
Т	1/0.315mm	+Brown/-White	25 metres	70657208	827-6028
Т	1/0.315mm	+Brown/-White	50 metres	70657206	827-6022
J	1/0.508mm	+Black/-White	25 metres	70657197	827-5990
J	1/0.508mm	+Black/-White	50 metres	70657201	827-6003
K	1/0.508mm	+Green/-White	25 metres	70657203	827-6012
K	1/0.508mm	+Green/-White	50 metres	70657204	827-6016
J	7/0.2mm	+Black/-White	25 metres	70657202	827-6006
K	7/0.2mm	+Green/-White	25 metres	70657207	827-6025
Т	7/0.2mm	+Brown/-White	25 metres	70657209	827-6031
N	7/0.2mm	+Pink/-White	25 metres	70657210	827-6034

	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order code
Exter	nsion:				Couc	
KX	7/0.2mm	+Green/-White	Green	10 metres	70657084	827-5615
KX	7/0.2mm	+Green/-White	Green	25 metres	70641729	236-3820
KX	7/0.2mm	+Green/-White	Green	50 metres	70657085	827-5619
KX	7/0.2mm	+Green/-White	Green	100 metres	70646156	611-7889
KX	7/0.2mm	+Green/-White	Green	200 metres	70657088	827-5628
	-1					
JX	7/0.2mm	+Black/-White	Black	10 metres	70641640	219-4753
JX	7/0.2mm	+Black/-White	Black	25 metres	70657078	827-5592
JX	7/0.2mm	+Black/-White	Black	50 metres	70657079	827-5596
JX	7/0.2mm	+Black/-White	Black	100 metres	70641737	236-3915
JX	7/0.2mm	+Black/-White	Black	200 metres	70657081	827-5606
TX	7/0.2mm	+Brown/-White	Brown	10 metres	70641637	219-4703
TX	7/0.2mm	+Brown/-White	Brown	25 metres	70641734	236-3870
TX	7/0.2mm	+Brown/-White	Brown	50 metres	70657095	827-5653
TX	7/0.2mm	+Brown/-White	Brown	100 metres	70651749	762-1146
TX	7/0.2mm	+Brown/-White	Brown	200 metres	70657098	827-5662
NX	7/0.2mm	+Pink/-White	Pink	10 metres	70641635	219-4668
NX	7/0.2mm	+Pink/-White	Pink	25 metres	70657091	827-5637
NX	7/0.2mm	+Pink/-White	Pink	50 metres	70657089	827-5631
NX	7/0.2mm	+Pink/-White	Pink	100 metres	70657092	827-5640



	Conductors	Cores	Jacket	Reel Length	Allied Code	RS order co	ode
Compensating:							
VX (KCB)	7/0.2mm	+Green/-White	Green	10 metres	70657082	827-5609	
VX (KCB)	7/0.2mm	+Green/-White	Green	25 metres	70641629	219-4551	
VX (KCB)	7/0.2mm	+Green/-White	Green	50 metres	70657080	827-5603	
VX (KCB)	7/0.2mm	+Green/-White	Green	100 metres	70641630	219-4573	
VX (KCB)	7/0.2mm	+Green/-White	Green	200 metres	70657083	827-5612	
VX (KCB)	13/0.2mm	+Green/-White	Green	10 metres	70657086	827-5621	
VX (KCB)	13/0.2mm	+Green/-White	Green	25 metres	70657087	827-5625	
VX (KCB)	13/0.2mm	+Green/-White	Green	50 metres	70657090	827-5634	
VX (KCB)	13/0.2mm	+Green/-White	Green	100 metres	70651750	762-1152	
U (RCA)	7/0.2mm	+Orange/-White	Orange	10 metres	70657096	827-5656	
U (RCA)	7/0.2mm	+Orange/-White	Orange	25 metres	70646158	611-7902	
U (RCA)	7/0.2mm	+Orange/-White	Orange	50 metres	70657097	827-5659	
U (RCA)	13/0.2mm	+Orange/-White	Orange	10 metres	70641641	219-4769	
U (RCA)	13/0.2mm	+Orange/-White	Orange	25 metres	70657093	827-5643	
U (RCA)	13/0.2mm	+Orange/-White	Orange	50 metres	70657094	827-5647	
T/C Type	Conductor			Reel Length	Allied	d code	RS order code
KX	1/0.2mm	+Yellow/-Red		25 metres	7065	6106	814-0030
KX	1/0.2mm	+Yellow/-Red		50 metres	7065	6111	814-0049
KX	1/0.2mm	+Yellow/-Red		100 metres	7065	6109	814-0042
KX	7/0.2mm	+Yellow/-Red		25 metres	7065	6110	814-0046
KX	7/0.2mm	+Yellow/-Red		50 metres	7065	6113	814-0055
KX	7/0.2mm	+Yellow/-Red		100 metres	7065		814-0058
NA .	7/0.211111	+Tellow/-Red		100 metres	7003	0114	814-0038
KX	1/0.3mm	+Yellow/-Red		25 metres	7065	6104	814-0024
KX	1/0.3mm	+Yellow/-Red		50 metres 70656107		6107	814-0033
KX	1/0.3mm	+Yellow/-Red		100 metres	7065	6108	814-0036
TX	1/0.3mm	+Blue/-Red		25 metres	7065	6121	814-0080
TX	1/0.3mm	+Blue/-Red		50 metres	7065	6126	814-0099
TX	1/0.3mm	+Blue/-Red		100 metres	7065		814-0092
1/4	1/0.311111	· blue/ - Neu		100 11101103	7003	0127	014-0052
TX	1/0.2mm	+Blue/-Red		25 metres	7065		814-0096
TX	1/0.2mm	+Blue/-Red		50 metres	7065	6128	814-0106
TX	1/0.2mm	+Blue/-Red		100 metres	7065	6129	814-0109



T/C Type	Conductors	Cores	Jacket	Reel Length	Allied code	RS order code
Extension:						
KX	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656102	814-0018
KX	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656105	814-0027
KX	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656103	814-0020
JX	7/0.2mm	+ White/-Red	Black	25 m	70656096	813-9995
JX	7/0.2mm	+ White/-Red	Black	100 m	70656098	814-0005
JX	7/0.2mm	+ White/-Red	Black	200 m	70656099	814-0008
TX	7/0.2mm	+Blue/-Red	Blue	25 m	70656119	814-0074
TX	7/0.2mm	+Blue/-Red	Blue	100 m	70656122	814-0083
TX	7/0.2mm	+Blue/-Red	Blue	200 m	70656123	814-0086
Compensation	ng:					
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	25 m	70656127	814-0103
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	100 m	70656130	814-0112
VX (KCB)	7/0.2mm	+Yellow/-Red	Yellow	200 m	70656131	814-0115