



ENGLISH

Datasheet

RS PRO Non-slip Waffle Rubber Mounting Pads – 60 Shore

Stock No: 2035156



Technical Specifications:


Lightweight, non-slip vibration isolation and noise suppression pad for applications where bolting needs to be avoided

LOAD RATINGS per SQUARE

| Durometer | Recommended Load per 2x2" sq. | | Recommended Load per Area | | | Maximum Load per Area | | |
|-------------|-------------------------------|------|---------------------------|-----------------------|-------|------------------------|-----------------------|-------|
| | (lbs) | (kg) | (lbs/in ²) | (kg/mm ²) | {kPa} | (lbs/in ²) | (kg/mm ²) | {kPa} |
| 30 | 80 | 35 | 20 | .014 | 138 | 27 | .019 | 186 |
| 40 | 120 | 55 | 30 | .021 | 207 | 40 | .028 | 276 |
| Standard 50 | 180 | 80 | 45 | .032 | 310 | 60 | .042 | 414 |
| 60 | 240 | 110 | 60 | .042 | 414 | 80 | .056 | 552 |
| 70 | 360 | 165 | 90 | .063 | 621 | 120 | .084 | 827 |

Features & Benefits:

- Anti-skid design through suction cup construction
- Reduces noise and vibration
- No bolting required
- Simple installation
- Easily cut to specific sizes

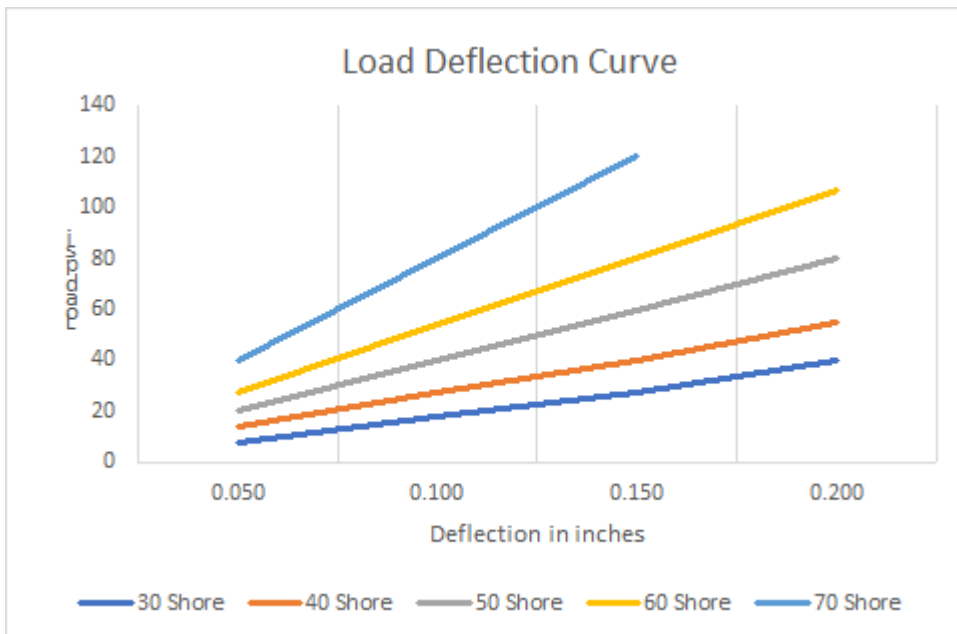

General

These general purpose Waffle Rubber Mounting Pads are one of a portfolio of solutions for noise and vibration reduction in applications where bolting needs to be avoided.

The Waffle Pad has a cup design on both sides that creates a suction effect on the mating surfaces to provide positive grip, isolating the equipment and stopping movement.

Re-usable when machinery is moved or relocated.
Lightweight for ease of handling and installation.

The 2" (50mm) squares are separated by a thin web of material that is easily cut to size on site.

