


LED DOWNLIGHT



DLS SERIES



Application

Cabins, Passageways, Galleys, Meeting rooms

Material

Powder coated aluminium alloy body and heatsink with PMMA diffuser

Protection Class


IP44

Weight

0.4Kg

Key Features

- Low profile suitable for shallow ceiling voids
- Triac dimming compatible
- 3 Selectable CCT: 3000K / 4000K / 6000K
- Energy savings of up to 50% compared to compact fluorescent system
- Vibration-resistant
- Long service life of 50,000 hours L70 @ 40°C (Ta)
- CE Marking, EMC safety compliance

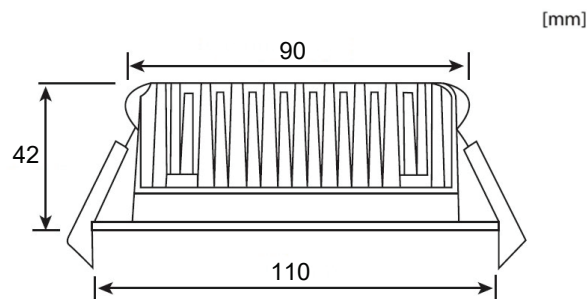

TECHNICAL SPECIFICATIONS



Ideal Replacement: 26W CFL

| BH Code | Type | Voltage | Power | CCT | Beam Angle | Ambient Temp (Ta) | System Lumen |
|------------|----------|----------------|-------|------------------------------|------------|-------------------|--------------|
| LADLS138A2 | DLS138A2 | 220V - 240V AC | 13W | 3000K/4000K/6000K Selectable | 90° | -20°C ~ +40°C | 1100lm |

