

Anti-Vandal Pushbutton Switches

SPECIFICATIONS:

BUSHING: \varnothing 12mm.
 CONTACT RATING: 2A @ 36VDC.
 ELECTRICAL LIFE: 50,000cycles at full load.
 CONTACT RESISTANCE: 50m-ohms max.
 INSULATION RESISTANCE: 1,000M-ohms min.
 DIELECTRIC STRENGTH: 1,500V RMS 50Hz.
 IP CLASS: IP67 front panel.
 TORQUE: 0.6Nm max. applied to nut
 OPERATING FORCE: 2.5~4N.
 OPERATING TEMPERATURE: -25°C~+55°C.


MATERIALS:

BUSHING: Stainless steel
 CONTACT: Stainless steel
 BASE: PA


ENGLISH

Specifications and Dimensions subject to change

SPST 12mm, Flat Button

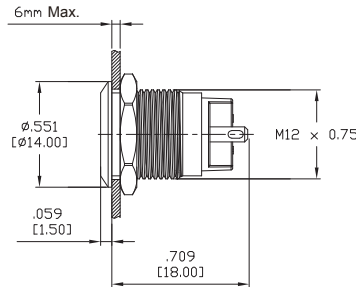


SPST 12mm, Raised Button

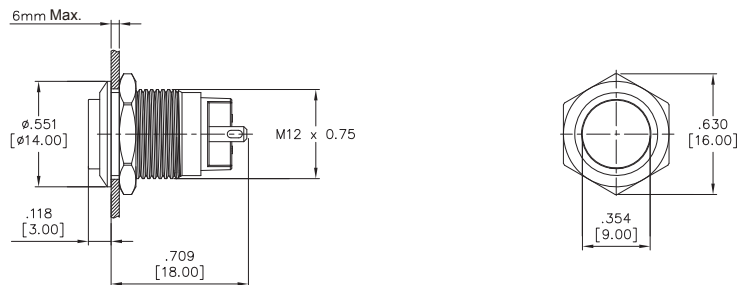

BUSHING & BUTTON MATERIAL OPTIONS

Code	Bushing Size	Bushing & Button Material	MOQ
B42	\varnothing 12mm	Stainless steel with varnished polished	100 PCS

HOW TO ORDER

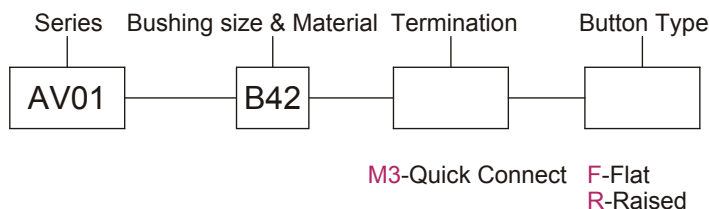

SPECIFICATIONS:



BUSHING: ϕ 12mm.
 CONTACT RATING: 2A @ 36VDC.
 ELECTRICAL LIFE: 50,000cycles at full load.
 CONTACT RESISTANCE: 50m-ohms max.
 INSULATION RESISTANCE: 1,000M-ohms min.
 DIELECTRIC STRENGTH: 1,500V RMS 50~60Hz.
 IP CLASS: IP67 front panel protection & IK08.
 TORQUE: 0.2Nm max. applied to nut
 OPERATING FORCE: 2.5~4N.
 OPERATING TEMPERATURE: $-20^{\circ}\text{C}\sim+55^{\circ}\text{C}$.

MATERIALS:



BUSHING: Stainless steel
 CONTACT: Stainless steel
 BASE: PA

Specifications and Dimensions subject to change



Illuminated SPST, Flat Dot Button

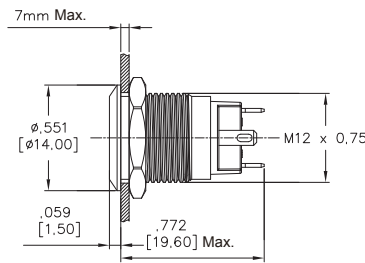



Illuminated SPST, Raised Dot Button

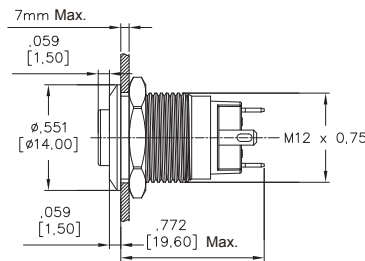

Illuminated SPST, Flat Ring Button

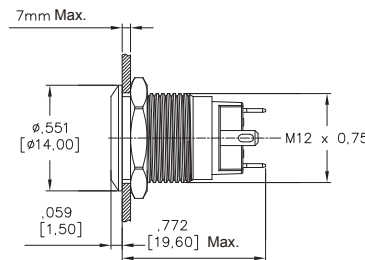

Illuminated SPST, Raised Ring Button

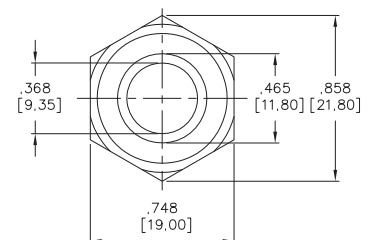

BUSHING & BUTTON MATERIAL OPTIONS

Code	Bushing Size	Bushing & Button Material	MOQ
B42	∅ 12mm	Stainless steel with varnished polished	100 PCS

HOW TO ORDER

