

DATA SHEET

RS ESSENTIALS SPEAKER

RS Stock Code: 7243119

Specifications


ABS-225-RC/RS

Impedance	8±15%Ω
Nominal power	0.15W
Maximum power	0.20W
Resonant frequency	1500±20%Hz
Frequency range	F 500-20,000Hz
Sound output level at 0.1W/0.5M	84±3dB
Operating temperature	-20°C~+60°C
Storage temperature	-30°C~+70°C
Weight	10g±5%

Features

- ROHS compliant
- Pin pitch: 17.5mm
- Housing material: ABS777
- Cone material: Mylar

All data at 25°C unless otherwise specified

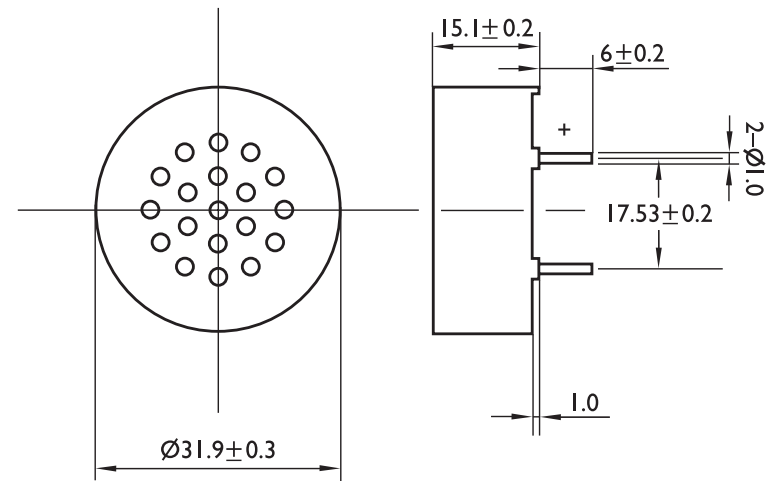

Dimensions Unit: mm




7243119 SPEAKER - Frequency Curve

SPEAKERS

X: 200.00Hz Y: 46.16dB ZA: Live Curve TSR fund.

A: Frequency Response, Magn dB re 20.00µPa/V

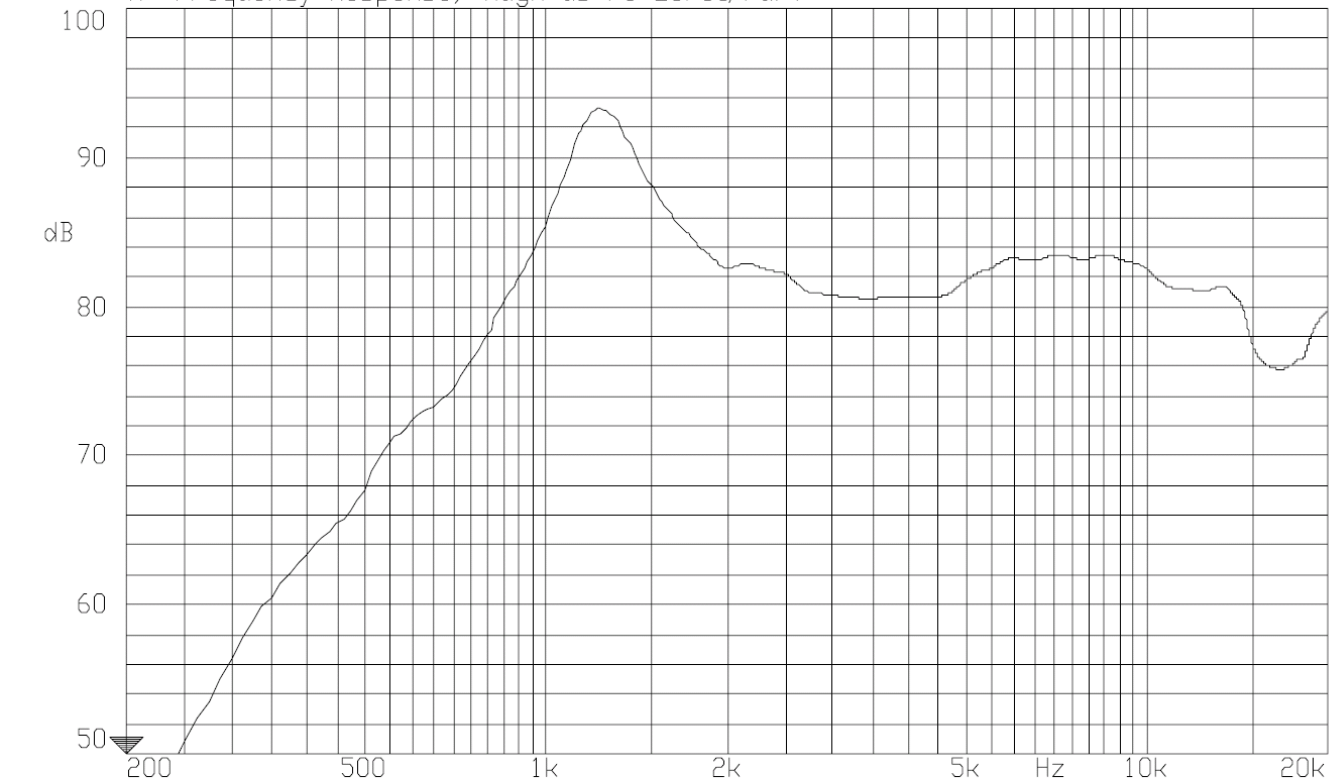

25-AUG-2010 13:38:35

Mode: TSR

