


REV	DESCRIPTION	DATE
△	RDK-94275 修改尺寸	張馨尹 2006/03/27

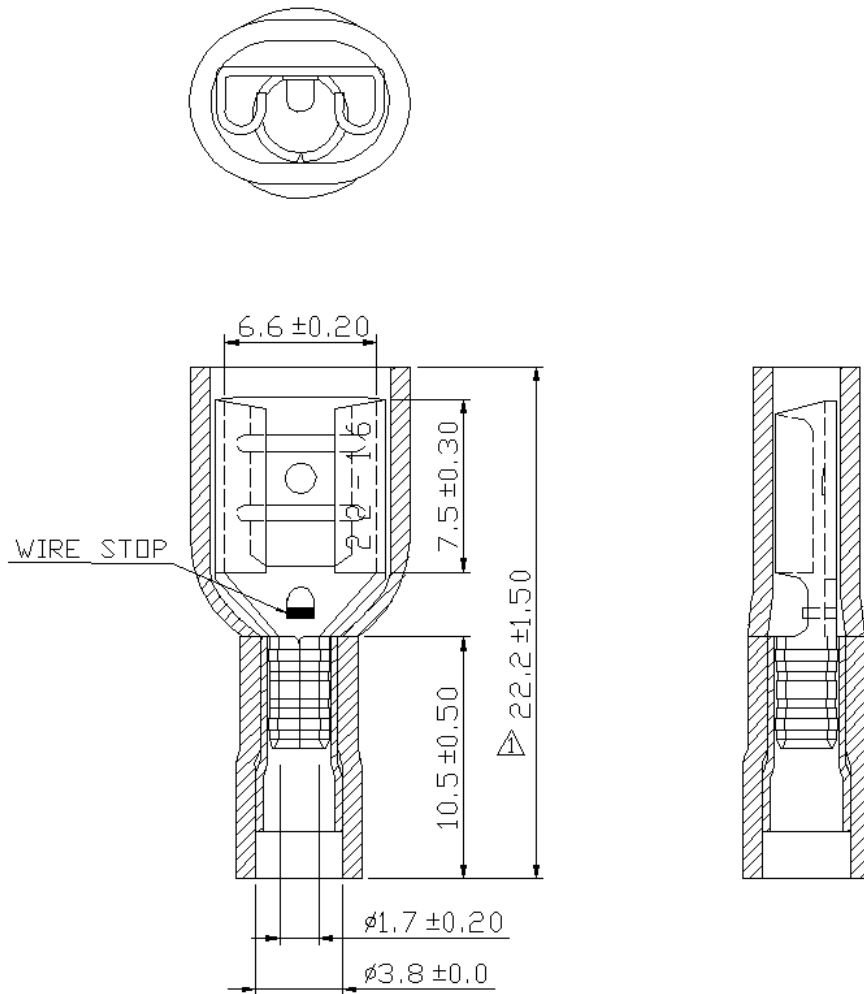

- NOTE:
- MAXIMUM ELECTRIC CURRENT : 

A.W.G.	22	20	18	16
AMP.	3	4	7	10
  - MAXIMUM ELECTRICAL RATING : 75°C 600 VOLTS MAX.
  - INSULATION MATERIAL : VINYL
  - INSULATION COLOR : RED
  - TERMINAL MATERIAL : BRASS
  - WIRE RANGE : 22-16 A.W.G.(0.5-1.5mm<sup>3</sup>)
  - TERMINALS SURFACE TREATMENT : TIN PLATED
  - DOUBLE CRIMP : WITH COPPER SLEEVE ON BARREL
  - THICKNESS : 0.4 mm

Tolerance Unless Otherwise Specified	
0 > 6 mm ± 0.20	ANGLE
6 > 18 mm ± 0.30	0° > ° REF ±
18 > 30 mm ± 0.40	° > ° ±
30 > 75 mm ± 0.50	° > ° ±

NAME	VINYL-FULLY INSULATED DOUBLE CRIMP FEMALE DISCONNECTORS			UNIT	mm	
PART NO.	FDFD1-250@	MATERIAL	-----	APPROVE	張馨尹	
NUMBER	KA-94341-C	SCALE	SHEET	PAGE	CHECKED	林暉鴻
DATE	2006/03/27	3/1	1-1	20F2	DRAWN	張馨尹

