


## Pneumatic die grinder - 1516

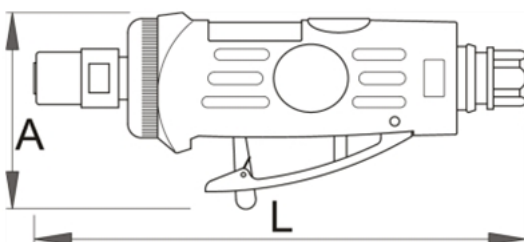

### Description

- free speed 25000 revolution per minutes
- maximum air pressure : 6, 2 Bar
- air consumption 113 l/min
- air inlet 1/4"
- collet capacity 6 mm
- internal hose size 10mm
- 

### Advantages:

- safety lever which prevents accidental turn-on
- simple clamping of thin cut-off wheels(grinding/polishing pins) and other parts/ extensions
- extreme power based on size
- small and compact tool
- continuously variable regulation of rpm
- 





### Usage

- precise grinding
- full grinding
- tool industry
- car industry
- aircraft industry
- cleaning of welds
- cleaning of concrete and wall surfaces
- cleaning of wooden surfaces
- removal of colors and varnish
- removal of rust
- grinding of bearings
- grinding of motor valves
- grinding of gears and coils
- various other surfaces

### Technical Data

|  | L   | A  |  |  |  |   |
|---|-----|----|---|---|---|---|
| 617731  | 155 | 60 | 390   | 1F  | 1   | - |

### Packaging data

| Retail tool packaging   |     |    |     |    |   |   | Transport package |    |    |   |
|---|-----|----|-----|----|---|---|-------------------|----|----|---|
|  | L   | A  | B   | C  |  |  | A1                | B1 | C1 |  |
| 61773<br>1  | 155 | 60 | 155 | 50 | 460   | 1   | -                 | -  | -  | -   |