


Tooling NO.
HPDB68:K00106104

REVISIONS			
DATE	LTR	DESCRIPTION	APVD.

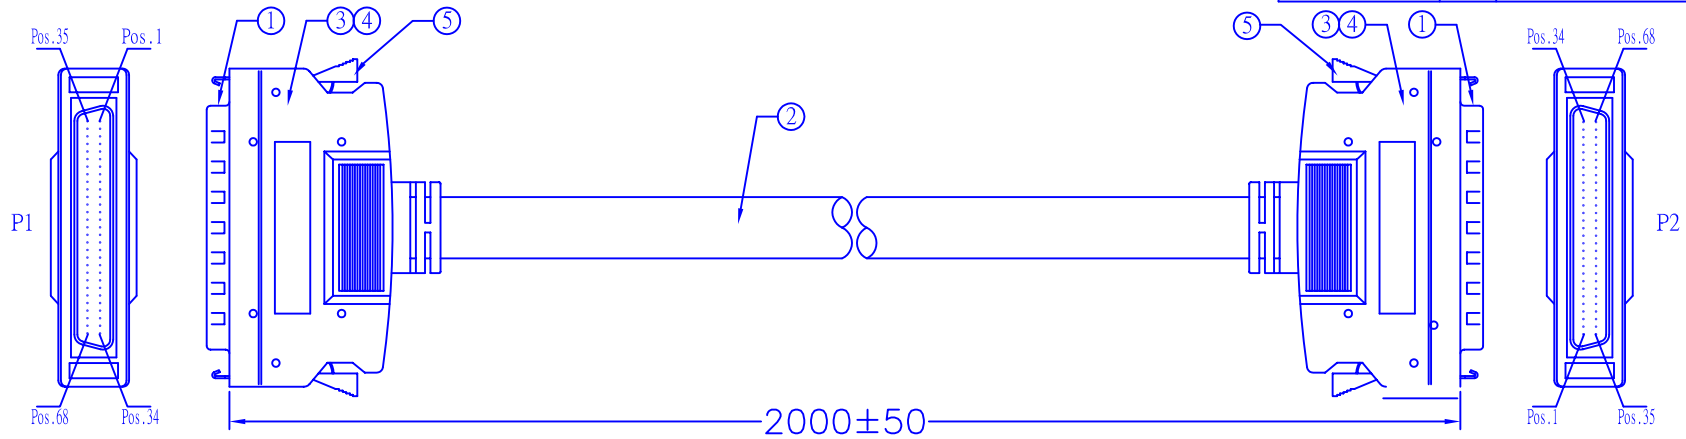

PIN ASSIGNMENT:

P1	1	35	2	36	3	37	4	38	5	39	6	40	7	41	8	42	9	43	10	44	11	45	12	46	13	47	14	48	15	49	16	50	17	51	18	52	19	53	20	54	21	55	56	23	57	24	58	25	59	26	60	27	61	28	62	29	63	30	64	31	65	32	66	33	67	34	68	SHELL
P2	1	35	2	36	3	37	4	38	5	39	6	40	7	41	8	42	9	43	10	44	11	45	12	46	13	47	14	48	15	49	16	50	17	51	18	52	19	53	20	54	21	55	56	23	57	24	58	25	59	26	60	27	61	28	62	29	63	30	64	31	65	32	66	33	67	34	68	SHELL



Note:

1. Stick RS Label on the PE Bag.
2. Bar code read "4365238".

5	4	EA	FLHD68NIPXX0001	Latch A4 Type, Color : Beige(BG01).
4	/	MM	SFC3010001	Copper Foil 360° Soldered
3	/	KG	DVINO40BG001	Molded PVC Color: Beige(BG01).
2	1	EA	W299028BG34PB000XM01	UL2990 28AWG 34TW/PR,Al/Mylar+Drain +Braid, Color: Beige(BG01).
1	2	EA	CHPDB068MBK10U000004	HPDB68 Male Pitch 1.27mm Shell: Tin Plated Insulation: Black PBT UL94V-0
ITEM	QTY	U/M	PART NO.	DESCRIPTION

TOLERANCE : X. ±0.2 X.X ±0.1 X.XX ±0.05		PART NO. 436-5238	REV. A
DRAWN BY			
CHECKED BY	PAGE 1 OF 1		
APPROVED BY	DATE 05/09/2002		
DWG NO.	-M NO. C44441680066M-01		