

Datasheet

RS PRO VGA to SVGA cable, Male to Male, 3m

Stock No: 182-8883

NOTE:



1. CABLE: 32AWG,UL20276,AL-FOIL,3COAX+9C,BLUE COLOR,OD=5.5mm,LSZH JACKET(LSZH)
2. LENGTH:L
3. CONNECTORS:HDB15M*2PCS(BLUE INSULATOR)*1PCS(SHELL NICKEL).
4. MOLD:MOLDING 45P PVC TYPE.
5. CONTACTS:


(P1)HDB15M	1	2	3	6+7+8	4	5	9	10	11	12	13	14	15	64
(P2)HDB15M	1	2	3	6+7+8	4	5	9	10	11	12	13	14	15	64
	RC	GC	BC	RG	GG	BG								

6. OPEN/SHORT TEST: 100% TEST.
 A.100% OPEN,SHORT&INTERMITANCE TEST.
 B.CONDUCTOR RESISTANCE: 3ohms MAX:
 C.INSULATION RESISTANCE: 5M Min/,DC300V 10ms:
7. ALL MUST BE MEET ON ROHS COMPLIANT.

Cable construction:

Manufacturer's photographs

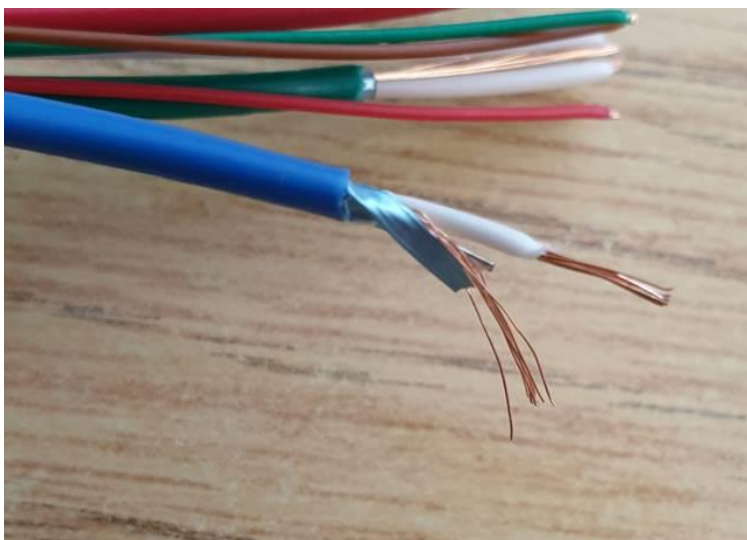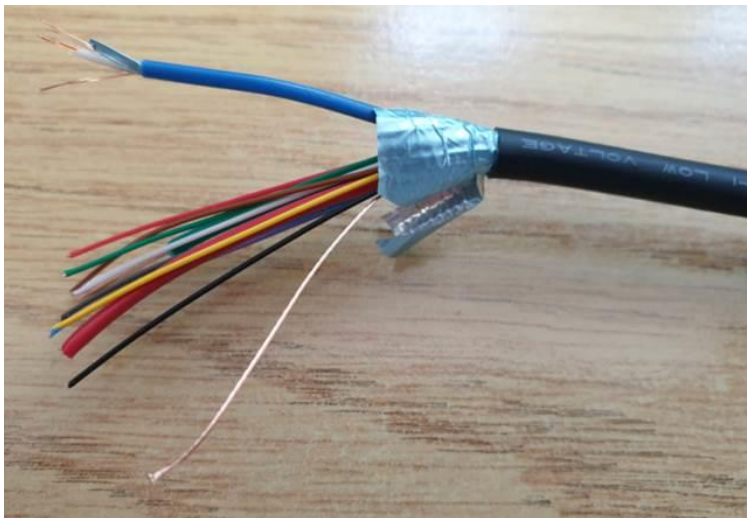

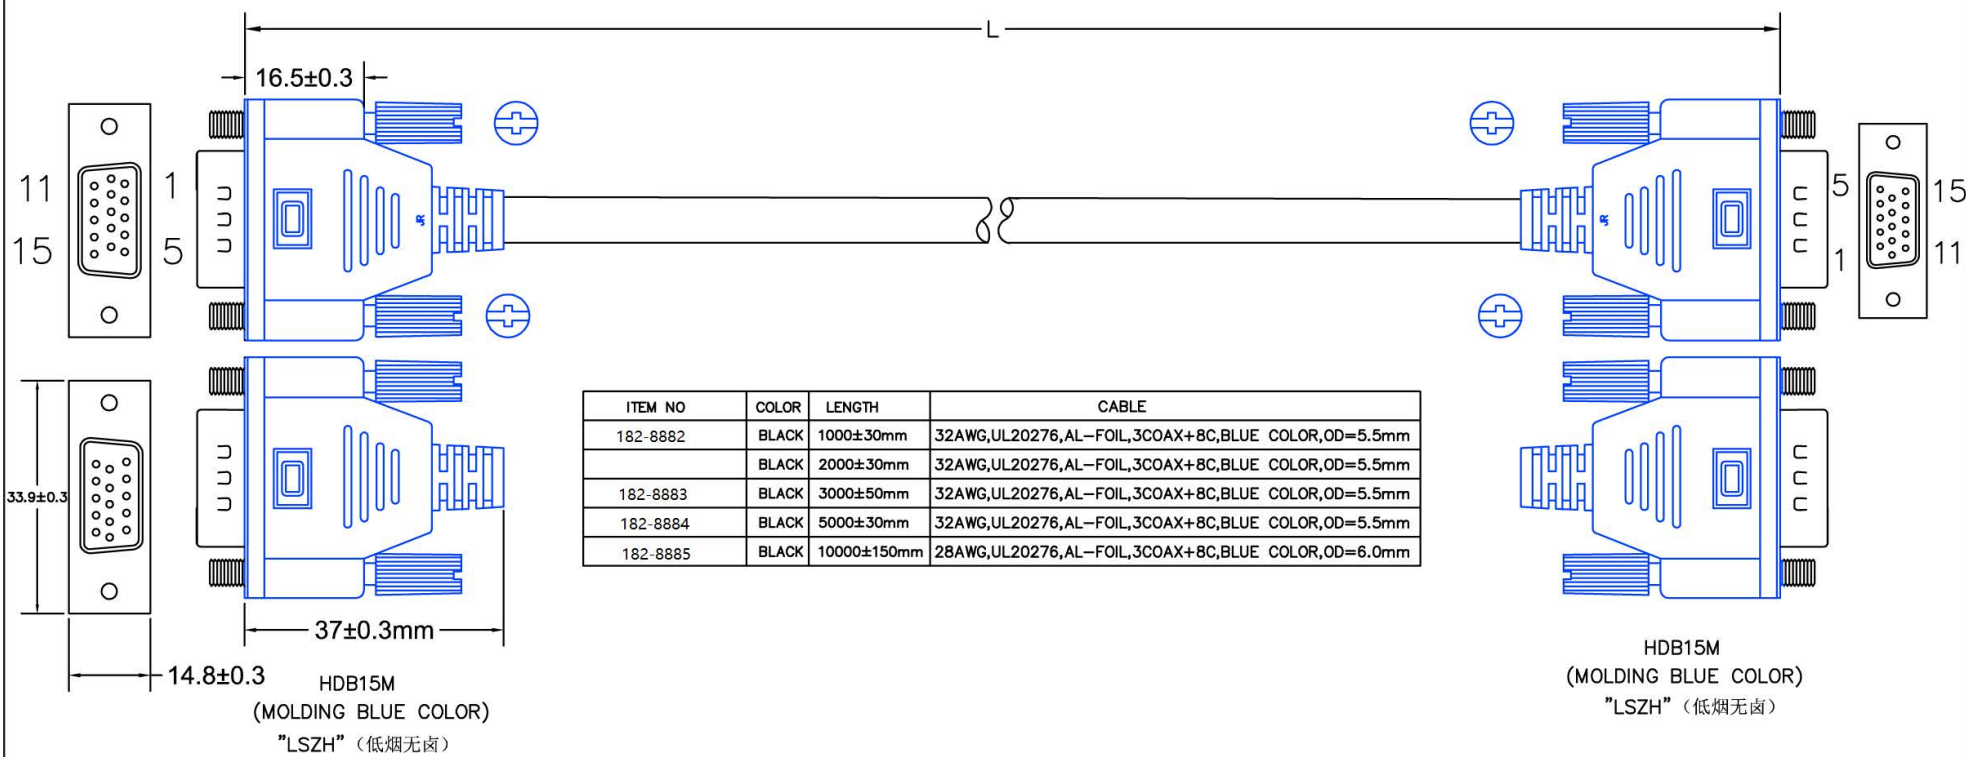


NOTE:

- CABLE: 32AWG,UL20276,AL-FOIL,3COAX+9C,BLUE COLOR,OD=5.5mm,LSZH JACKET(LSZH). 材质"LSZH" (低烟无卤)
- LENGTH: L.
- CONNECTORS:HDB15M*2PCS(BLUE INSULATOR)*1PCS(SHELL NICKEL).
- MOLD: MOLDING 45P PVC TYPE.
- CONTACTS:

(P1)HDB15M	1	2	3	6+7+8	4	5	9	10	11	12	13	14	15	64
(P2)HDB15M	1	2	3	6+7+8	4	5	9	10	11	12	13	14	15	64
	RC	GC	BC	RG	GG	BG								
- OPEN/SHORT TEST: 100% TEST.
 - 100% OPEN,SHORT&INTERMITANCE TEST.
 - CONDUCTOR RESISTANCE: 3ohms MAX:
 - INSULATION RESISTANCE: 5M Min/,DC300V 10ms:
- ALL MUST BE MEET ON ROHS COMPLIANT.

HDB15M
(MOLDING BLUE COLOR)
"LSZH" (低烟无卤)



PACKING: 1PCS/Opp BAG+LABEL

COMPANY	CDL		ITEM NO.	No	B	Parts Name	SCALE	NON
REVISION	DATE	DISCRIPTION	DRAWN BY				UNIT(mm)	
REV.A/0	2019.01.08		DESIGNED BY				PAGE	1/1
			APPROVAL BY					

