


43 83-155



ER

Standard	Result
T/ZSJL 001-2019	✓
T/ZSJL 002-2019	✓
T/ZSJL 003-2019	✓

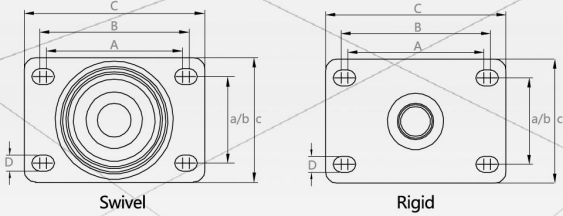












Wheel: Elastic Rubber (ER).

Wheel surface hardness: 65-70°Shore A.

Wheel core structure: Nylon (PA).

Bearing: SUPO customization single ball bearing with dust-proof cover.

* Remark: Please refer to the standard of Zhongshan caster industry association.

Swivel Top Plate	 Wheel Material	NO. Model	 Wheel Dia (mm)	 Tread Width (mm)	 Load Capacity (kg)	 Load Height (mm)	 Swivel Radius (mm)	 Brake Swivel Radius (mm)	 Bearing	 Plate size (mm)	 Hole Spacing (mm)	 Hole size (mm)
	(ER)	X43-01-75-521	75(3")	32	83	105	70	112.5	 Single Ball Bearing	(C)98x65	(A)71x45 (B)78x45	(D)8.5
		X43-01A-75-521										
		X43-04-75-521										
		X43-01-100-521										
		X43-01A-100-521	100(4")		112	130	82.5	112.5				
		X43-04-100-521										
		X43-01-125-521	125(5")		125	156	95	115.5				
		X43-01A-125-521										
X43-04-125-521												

- Customization
- 01 series
- 03S series
- 05S series
- 07S series
- 08 series
- 09C series
- 10 series
- 11 series
- 12 series
- 13 series
- 17 series
- 20 series
- 21 series
- 23 series
- 24 series
- 27series
- 28 series
- 30 series
- 35 series
- 43 series
- F02 series
- L01 series