

Datasheet

RS PRO UL1015 Black, 2.1 mm² Hook Up Wire, 30.5m

Stock No: 1214295



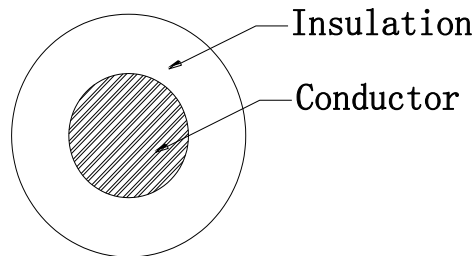
Technical Specifications:



Conductor	Tinned Copper
Cores Number	1C
Size(AWG)	14AWG
Construction(± 0.008 mm)	41/0.25
Stranded Dia.(mm)	1.88
Insulation Material	PVC
Insulation Color	Black
Ave Thickness(mm)	0.81
Min Thickness(mm)	0.61
Insulation Dia.(± 0.10 mm)	3.51

Features & Benefits:

- **Temperature Range: -40 to 105 °C**
- **Conductor resistance(20°C Ω/km): 9.18Max.**
- **Insulation DC Resistance(20°C MΩ*Km): 200Min.**
- **Rated Voltage: 300V**

Cross Section drawings



Cable Marking: E254881  AWM STYLE 1015 14AWG
105°C 600V VW-1 C  AWM I A 105°C 600V FT1 -LF- -F-
ELETECK

Applications: Hook up wire can be used for a broad range of applications, whether that be in a control cabinet, high-temperature oven, or in a specialised machine tool.